



# YOSHIMURA

RESEARCH&DEVELOPMENT OF AMERICA, INC.


5420 DANIELS STREET STE A, CHINO CALIF. 91710 · (800)634-9166 · (909)628-4722 · FACSIMILE (909)591-2198

[www.yoshimura-rd.com](http://www.yoshimura-rd.com)

**020HA147000**

**BAR END KIT**

NO.	DESCRIPTION	QTY	PART #
1	Yoshimura Bar End	2	020HA147000F
2	8mm x 40mm Socket Heat Bolt	2	M8X40
**	Yoshimura Sticker	1	17020C

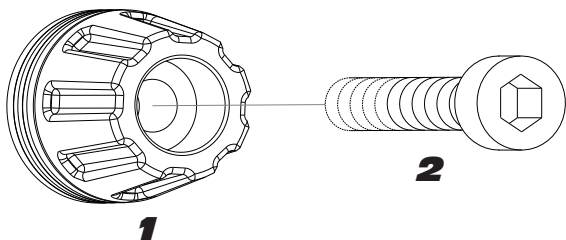

### Installation Instructions

1. Remove stock bar end weights
2. Install Yoshimura bar ends.  
Use a lightweight thread lock on bolt threads.  
Torque to 23 ft-lbs (16.5 N-m).



# YOSHIMURA

RESEARCH&DEVELOPMENT OF AMERICA, INC.


5420 DANIELS STREET STE A, CHINO CALIF. 91710 · (800)634-9166 · (909)628-4722 · FACSIMILE (909)591-2198

[www.yoshimura-rd.com](http://www.yoshimura-rd.com)

**020HA147000**

**BAR END KIT**

NO.	DESCRIPTION	QTY	PART #
1	Yoshimura Bar End	2	020HA147000F
2	8mm x 40mm Socket Heat Bolt	2	M8X40
**	Yoshimura Sticker	1	17020C

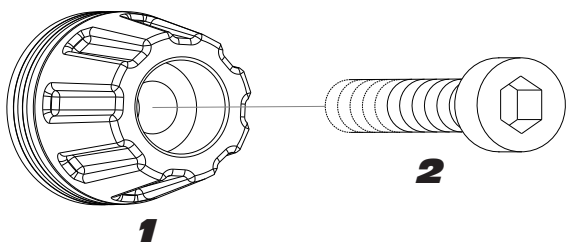

### Installation Instructions

1. Remove stock bar end weights
2. Install Yoshimura bar ends.  
Use a lightweight thread lock on bolt threads.  
Torque to 23 ft-lbs (16.5 N-m).