



YOSHIMURA

RESEARCH&DEVELOPMENT OF AMERICA, INC.

5420 DANIELS STREET STE A, CHINO CALIF. 91710 · (800) 634-9166 · (909) 628-4722 · FACSIMILE (909)591-2198

www.yoshimura-rd.com


YOSHIMURA CASE SAVER KIT

YAMAHA

FZ-09

FJ-09

030HA139900

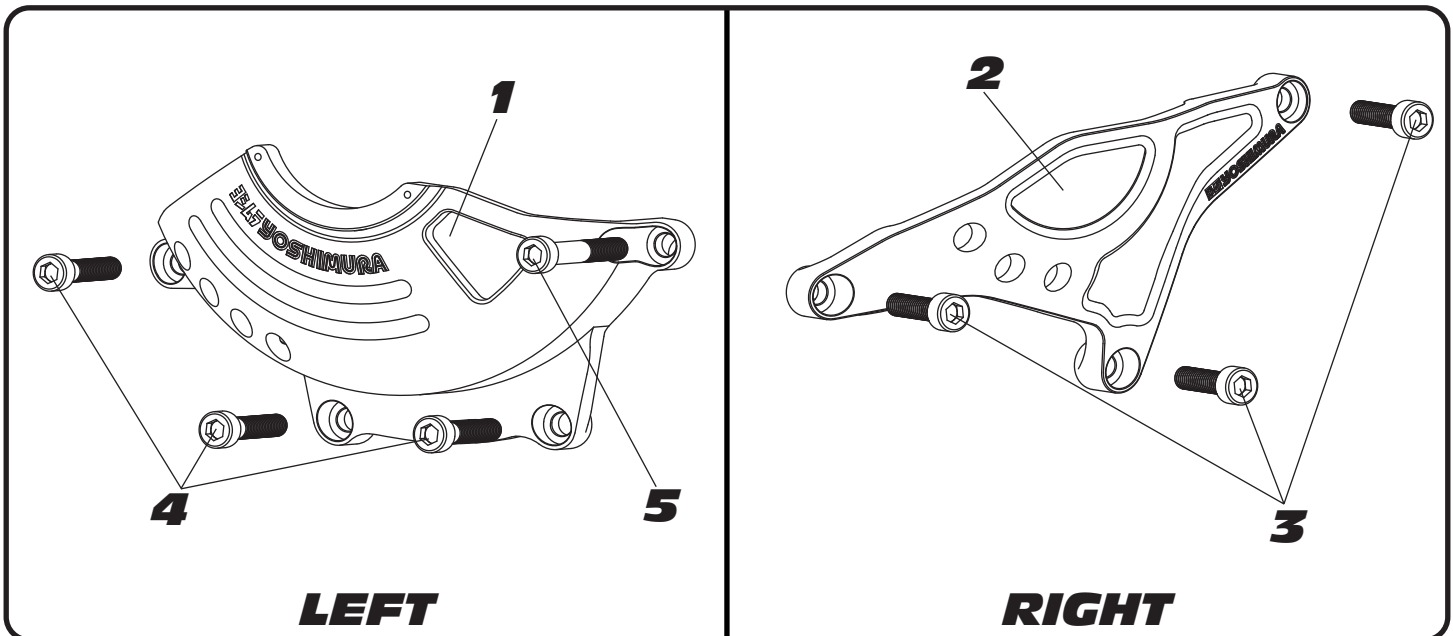

Part List:

NO.	DESCRIPTION	QTY	PART #
1	Left Case Saver	1	030HA139900L
2	Right Case Saver	1	030HA139900R
3	6mm x 25mm Socket Head Cap Bolt	3	M6X25
4	6mm x 35mm Socket Head Cap Bolt	3	M6X35
5	6mm x 50mm Socket Head Cap Bolt	1	M6X50
**	Yoshimura Sticker	2	17020C

Yoshimura Case Savers are designed to reduce damage to the engine cases in the event of a light or mild crash ONLY. The Case Savers are not designed to prevent damage to the engine cases completely, nor are they designed to prevent damage to fairings or body work.

Read through all instructions before beginning installation be sure to prepare a clean work area. Take necessary safety precautions to ensure a safe working environment. Always use a bike stand whenever available.

Tools Required:

Metric Socket Set
Ratchet and Extension
Metric Allen Socket Set
Torque Wrench

Installation Steps:

1. Remove the four left side engine cover bolts.

Note: Do not remove engine cover.

2. Install Yoshimura left side case saver using the supplied 6mm x 35mm bolts and 6mm x 50mm bolt as shown on the diagram on page 1.

*Note*¹: It is recommended to place bike on rearstand. Engine oil may leak from the case bolt circled in the image if leaned over onto the kickstand.

*Note*²: Install 50mm bolt closest to the rear of the left side engine cover.

*Note*³: The stock hose bracket must be re-installed between the engine cover and Yoshimura case saver.

3. Torque bolts to factory specification.
4. Remove the three right side engine cover bolts.

Note: Do not remove engine cover.

5. Install Yoshimura right side case saver using the supplied 6mm x 25mm bolts. See diagram on page 1 for proper orientation.
6. Torque bolts to factory specification.

