



YOSHIMURA


RESEARCH&DEVELOPMENT OF AMERICA, INC.

5420 DANIELS STREET STE A, CHINO CALIF. 91710 · (800)634-9166 · (909)628-4722 · FACSIMILE (909)591-2198

www.yoshimura-rd.com

060RD225701

Brake Clevis Kit
2002-2014 Honda CRF450F
2004-2014 Honda CRF250F
2005-2014 Honda CRF450X
2004-2014 Honda CRF250X

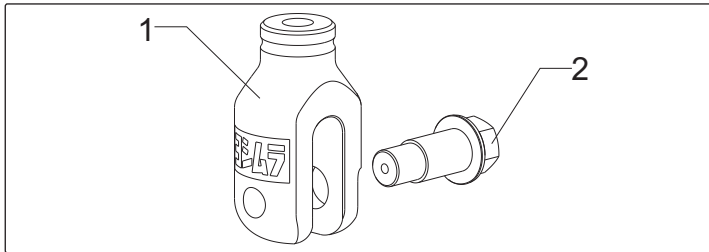

Tools Required

Combination Wrench Set • Pliers • Safety Wire

Instructions:

1. Loosen nut above stock brake clevis.
2. Remove stock cotter pin, stock washer, and stock clevis pin.
3. Remove stock brake clevis.
4. Install Yoshimura brake clevis as shown in the diagram with the clevis pin bolt from the back.
Note: Adjust brake pedal accordingly. When desired position is achieved, tighten nut above clevis.
5. To prevent the pin from backing out, install safety wire through hole in clevis pin bolt.

NO.	DESCRIPTION	QTY	PART #
1	Brake Clevis	1	060RD225701F
2	Clevis Pin Bolt	1	M6BOLT-BRKCLV



YOSHIMURA


RESEARCH&DEVELOPMENT OF AMERICA, INC.

5420 DANIELS STREET STE A, CHINO CALIF. 91710 · (800)634-9166 · (909)628-4722 · FACSIMILE (909)591-2198

www.yoshimura-rd.com

060RD225701

Brake Clevis Kit
2002-2014 Honda CRF450F
2004-2014 Honda CRF250F
2005-2014 Honda CRF450X
2004-2014 Honda CRF250X

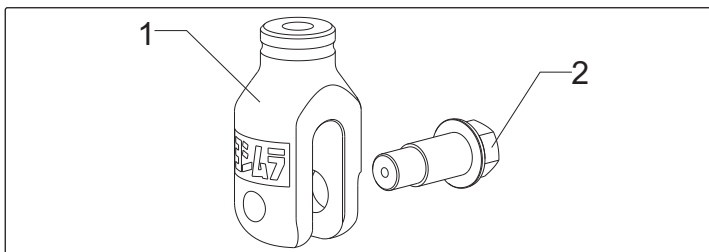

Tools Required

Combination Wrench Set • Pliers • Safety Wire

Instructions:

1. Loosen nut above stock brake clevis.
2. Remove stock cotter pin, stock washer, and stock clevis pin.
3. Remove stock brake clevis.
4. Install Yoshimura brake clevis as shown in the diagram with the clevis pin bolt from the back.
Note: Adjust brake pedal accordingly. When desired position is achieved, tighten nut above clevis.
5. To prevent the pin from backing out, install safety wire through hole in clevis pin bolt.

NO.	DESCRIPTION	QTY	PART #
1	Brake Clevis	1	060RD225701F
2	Clevis Pin Bolt	1	M6BOLT-BRKCLV