



# YOSHIMURA


RESEARCH&DEVELOPMENT OF AMERICA, INC.

5420 DANIELS STREET STE A, CHINO CA., 91710 · (800) 634-9166 · (909) 628-4722 · FAX (909) 591-2198

[www.yoshimura-rd.com](http://www.yoshimura-rd.com)

## **FENDER ELIMINATOR KIT**

**070BG191350**  
**Benelli TNT 135**

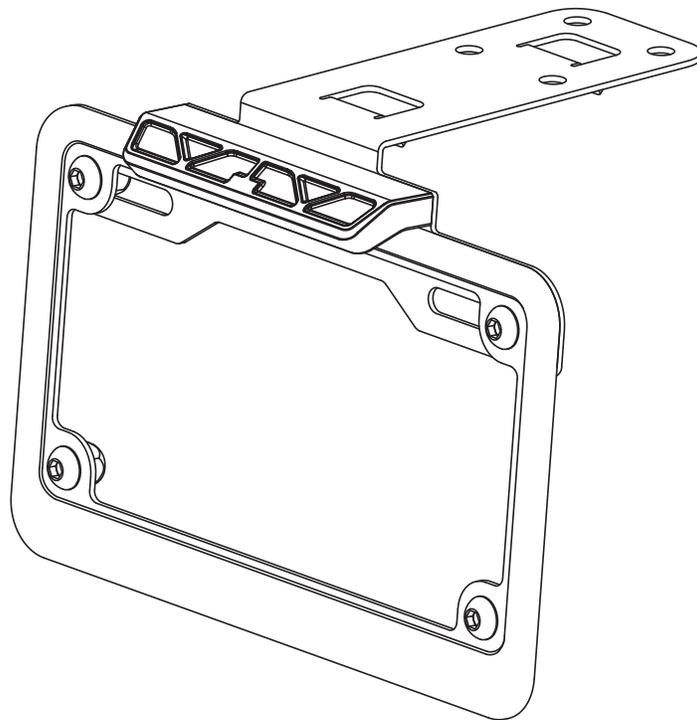


**THIS PRODUCT IS NOT DOT APPROVED.**

Yoshimura R&D of America, Inc. is not liable or responsible for any resulting event caused by the installation of this product. Check with local laws and regulations for compliance prior to installation and use. This product is not intended for use on public highways.



## Assembly Diagram

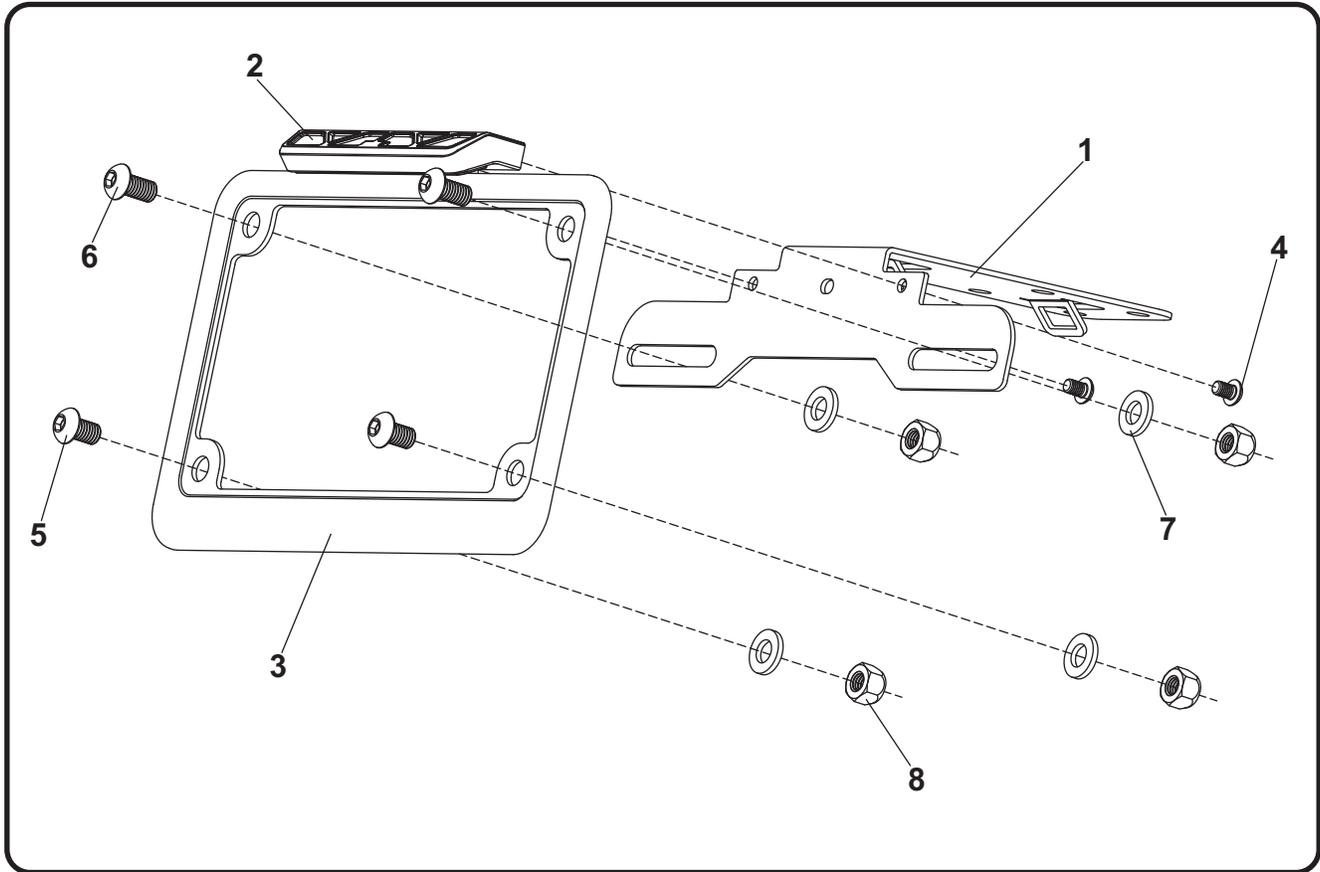

| No.                   | Item         | Description                                 | Qty. |
|-----------------------|--------------|---|------|
| 1                     | 19135-FEBKT  | Fender Eliminator Bracket                   | 1    |
| 2                     | 070BG-LH-K1  | LED Fender Eliminator Light                 | 1    |
| 3                     | 070BG-LPF    | License Plate Frame                         | 1    |
| 4                     | M4X6BHS      | 4mm x 6mm Button Head Screw                 | 2    |
| 5                     | M6X10BHS     | 6mm x 10mm Button Head Screw                | 2    |
| 6                     | M6X12BHS     | 6mm x 12mm Button Head Screw                | 2    |
| 7                     | 6MMWASHER    | 6mm Washer                                  | 4    |
| 8                     | 6MMLN        | 6mm Nylon Lock Nut                          | 4    |
| **                    | 17029        | Yoshimura Sticker Kit                       | 1    |
| **                    | BN-SSS-22-18 | Butt Connectors                             | 2    |
| <b>Optional Parts</b> |              |   |      |
|                       | 072BGLTSFK   | Yoshimura LED Front Turn Signal Kit         |      |
|                       | 072BGLTSR    | Yoshimura LED Rear Turn Signal Kit w/ Relay |      |
|                       | 070BGUNVTBKT | Universal Turn Signal Bracket Kit           |      |

\*\* Not shown on diagram.


\*\*\* The Yoshimura Universal Turn Signal Bracket Kit is to be used with aftermarket stud-mounted turn signals and is sold separately.

## Removal


1. Remove passenger seat.
2. Locate and disconnect license plate light connector.
3. Remove the four bolts securing the stock rear fender to swingarm. Carefully remove the stock fender assembly by fishing the license plate light wire out. Be sure not to damage connector during removal as they will be re-used.
4. Cut the stock license plate light wires from the stock fender assembly. Cut wires 8" from the connector.

## Installation

1. Install (No. 2) *070BG-LH-K1*, Yoshimura fender eliminator light onto (No. 1) *19135-FEBKT*, Yoshimura fender eliminator bracket using (No. 4) *M4X6BHS*, 4mm button head screws provided in the kit.

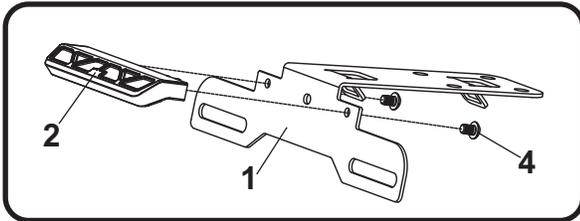

2. Install (No. 3) *070BG-LPF*, license plate frame to (No. 1) *19135-FEBKT*, fender eliminator bracket using (No. 5,6) *M6X10BHS* & *M6X12BHS*, 6mm screws, (No. 7) *6MMWASHER*, 6mm washer, and (No. 8) *6MMLN*, 6mm nylon lock nut.

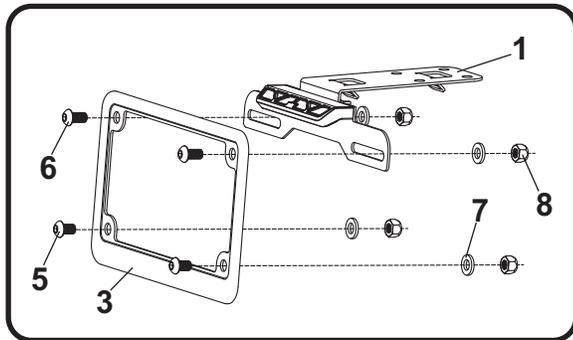

3. Connect the Yoshimura license plate light wires to the stock license plate light as follows:

Red -to- Red / White  
Black -to- Black

- a) Strip the stock fender light wire ends 1/4" - 1/2" and insert into *BN-SSS-22-18*, butt connectors provided in the kit.
- b) Center the spliced wire ends in the middle and using a heatgun or lighter, apply heat evenly on the outer edges of the butt connector to shrink and hold wires in place.
- c) Making sure that the stripped ends are centered, heat the center of the butt connector evenly until the solder begins to liquify.
- d) Allow to cool completely and tug both ends of the wires to verify that connection is secured.


Scan for link to butt connector instruction video.



4. Remove the four screws in undertail and remove the rubber cover to route wires through undertail. Install (No. 1) *19135-FEBKT*, fender eliminator bracket using the stock screws.



5. Route license plate light wires through loops on (No. 1) 19135-FEBKT, fender eliminator bracket and through hole in undertail where the rubber cover was previously removed.

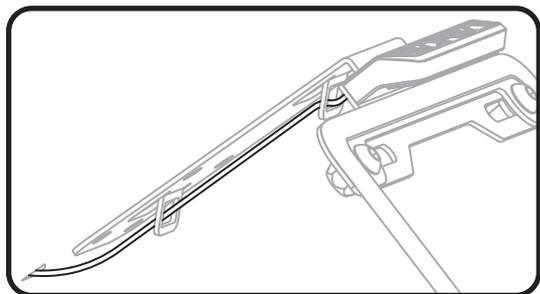

6. Re-connect license plate light connectors.
7. Re-install passenger seat.
8. Check for proper function of license plate light, turn signals, brake light, and that all brackets and components are secure prior to riding.