



YOSHIMURA

RESEARCH&DEVELOPMENT OF AMERICA, INC.

5420 DANIELS STREET STE A, CHINO CA., 91786 · (800)634-9166 · (909)628-4722 · FACSIMILE (909)591-2198

www.yoshimura-rd.com

YOSHIMURA FLOAT BOWL VENT CANISTER

K002

FLOAT BOWL VENT CANISTER



Part List:

NO.	DESCRIPTION	QTY	PART #
**	Yoshimura Float Bowl Vent Canister	1	K002-FBVC
**	Yoshimura Stickers	2	17028-BLK
**	Zip-Ties	2	ZT-100
**	Rubber Cushion	1	K002-E

NOTE: IN THE STATE OF CALIFORNIA, IT IS ILLEGAL TO MODIFY THE EMISSION CONTROL SYSTEM, WHICH INCLUDES THE CARBURETOR(S) OF ANY VEHICLE.

Note: Read through all instructions before beginning installation.

Tools Needed:

8mm and 10mm socket
Ratchet and medium extension

Installation Steps:

1. Remove seat and fuel tank.
2. Locate the two upper float bowl vent tubes (as shown in Fig. 1 and Fig.2).
3. Route the float bowl upper vent tubes into the airbox.
4. Cut the ends of the float bowl vent tubes off so the slit in the tube is gone.
5. Connect each of the tubes to the Yoshimura float bowl vent canister.

NOTE: If needed use the supplied rubber strip to stop the canister from slipping or from getting scratched.

6. Locate an area in the airbox where the Yoshimura float bowl vent canister can be secured (as shown in Fig. 3).
7. Secure the vent tubes on the sub-frame with the supplied zip-ties.
8. Install fuel tank and seat making sure that the float bowl vent tubes are not pinched or crushed anywhere.
9. If any problem is found, please carefully follow through the installation steps again. If problems still persist, please call Yoshimura technical department at (800)634-9166 / in CA (909)628-4722.

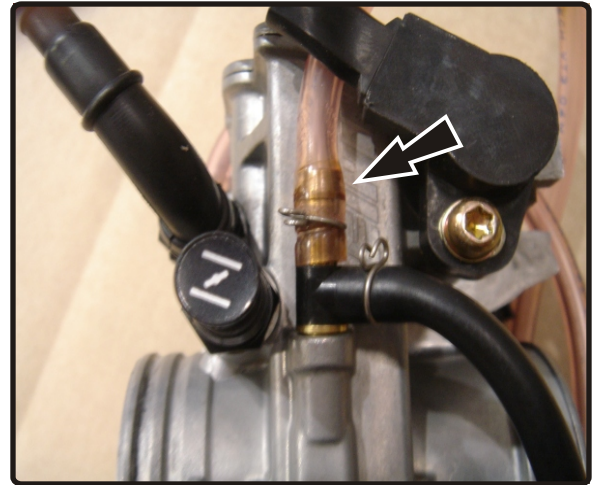


Fig. 1

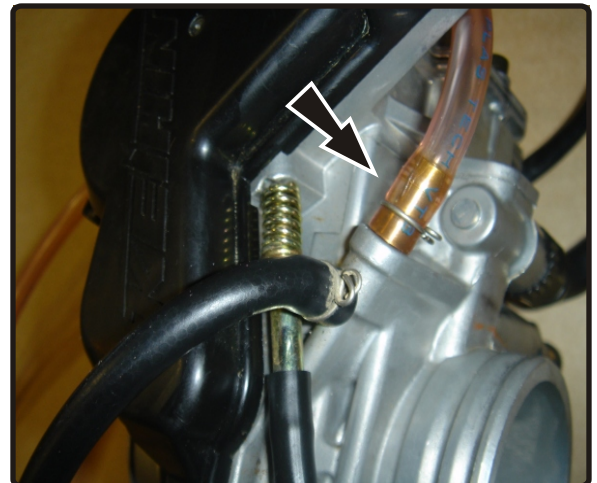


Fig. 2

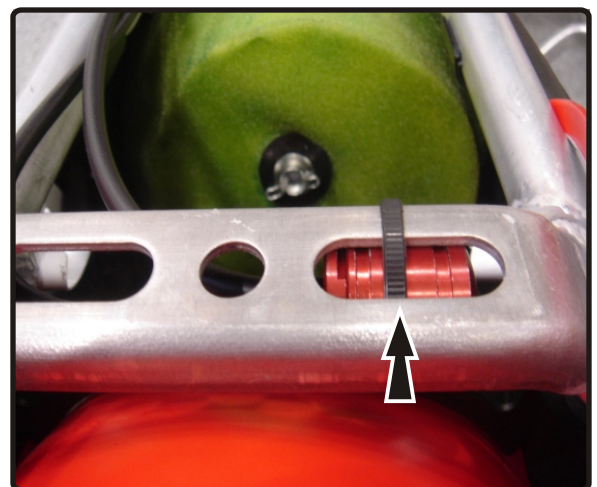


Fig. 3