



# YOSHIMURA


RESEARCH&DEVELOPMENT OF AMERICA, INC.

5420 DANIELS STREET SUITE A, CHINO, CA 91710 · (800)634-9166 · (909)628-4722 · FACSIMILE (909)591-2198

[www.yoshimura-rd.com](http://www.yoshimura-rd.com)

**RS3-INS-K**

**YOSHIMURA RS3 INSERT KIT**

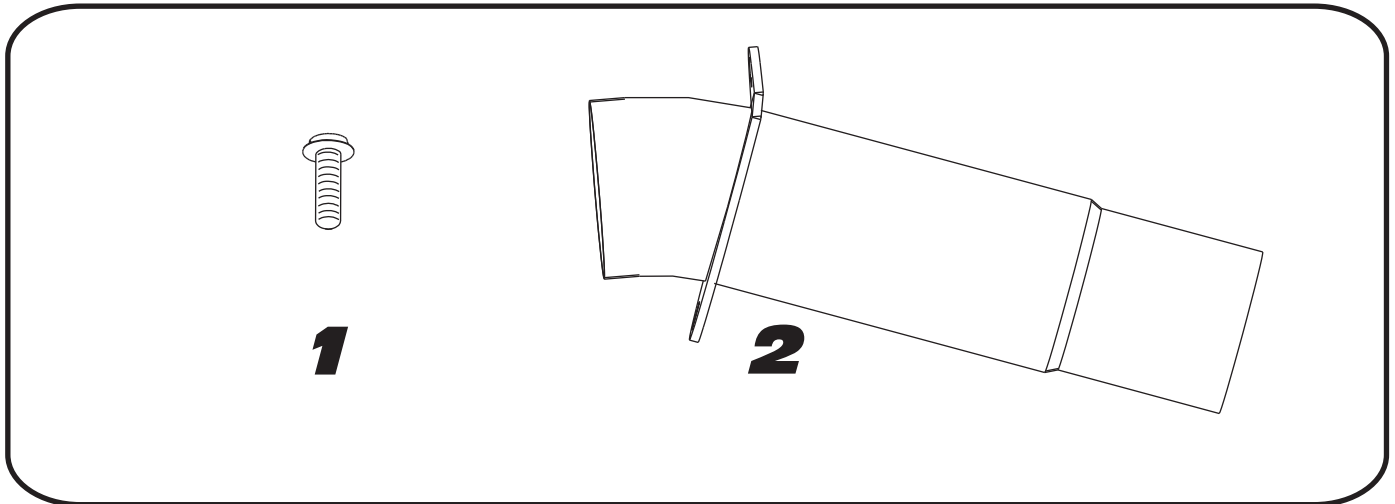

Parts Diagram

NO.	DESCRIPTION	QTY	PART #
1	6mmX10mm Button Head Cap Screw	2	M6X10BHS
2	RS3 Low Volume Insert	1	RS3-INS

**Caution:** Muffler can be extremely hot. Let muffler cool down before installing sound inserts.

**Note:** Read through all instructions before beginning disassembly.

### **Tools Needed:**

4mm Allen Key

### **Installation Steps:**

1. Place insert inside the outlet of Yoshimura muffler.
2. Secure insert using supplied button head cap screw. Torque to 8 lb-ft.

**NOTE:** It is recommended that a low strength "Loc-tite" is used on the button head cap screw.