



YOSHIMURA

RESEARCH&DEVELOPMENT OF AMERICA, INC.

5420 DANIELS STREET STE A, CHINO CA., 91710 · (800) 634-9166 · (909) 628-4722 · FAX (909) 591-2198

www.yoshimura-rd.com


TURN SIGNAL ADAPTER PLATES

Suzuki

DR-24S

DR-24SM

073BG116610

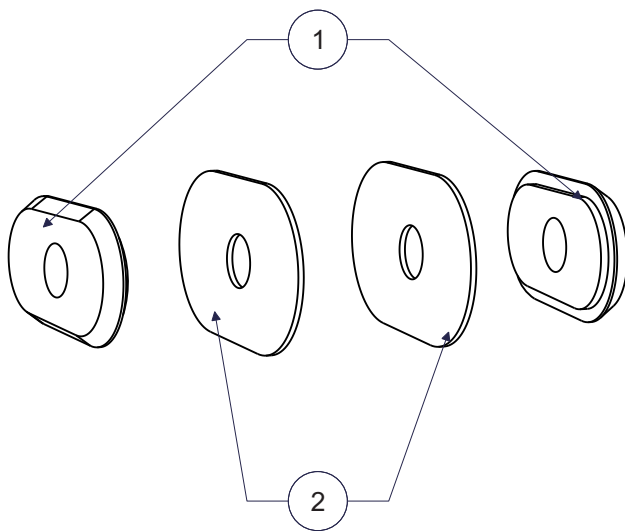

No.	Item	Description	Qty.
1	074BG11661-B	Front Turn Signal Plate	2
2	074BG11661-IN	Metal Inner Plate	2

Removal

1. Remove headlight fairing mounting bolts (6x).

Note: The top and bottom bolts are shorter than the middle bolts.

2. Locate and disconnect turn signals.
3. Remove turn signals from mounting brace.

Installation

1. Install *073BG11661-B*, turn signal plate from the outside and *073BG11661-IN* metal back plate from the inside to install the aftermarket turn signal. Secure using turn signal washer and nut.

2. Repeat steps for opposite side.

3. Re-connect turn signal connectors.

Note: *073BG-KTM* turn signal adapter wires are available for purchase separately for direct plug-and-play alternative with Yoshimura LED turn signals.

4. Reinstall headlight fairing.

5. Check for proper function of turn signals and that all components are secure prior to riding. Adjust turn signal rotation as needed and tighten turn signal nut.