



# YOSHIMURA


RESEARCH&DEVELOPMENT OF AMERICA, INC.

5420 DANIELS STREET STE A, CHINO CA., 91710 · (800) 634-9166 · (909) 628-4722 · FAX (909) 591-2198

[www.yoshimura-rd.com](http://www.yoshimura-rd.com)

## **TURN SIGNAL ADAPTER PLATES**

### **Honda Monkey 073BG121300**

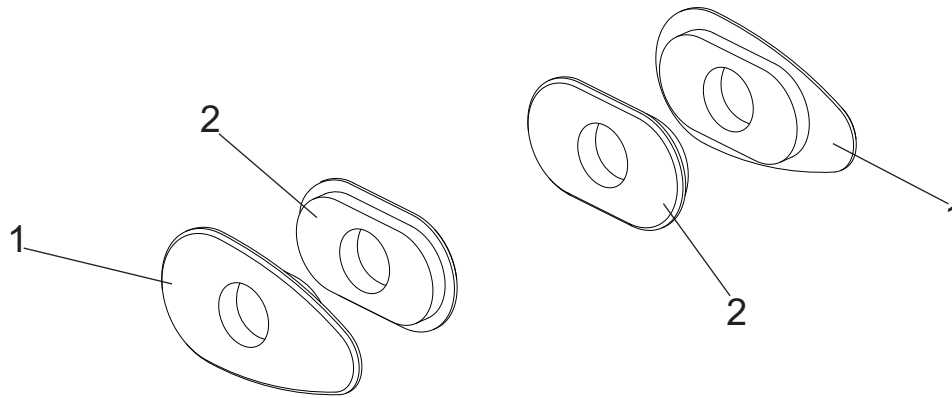

No.	Item	Description	Qty.
1	-	Front Turn Signal Plate, Outside	2
2	-	Front Turn Signal Plate, Inside	2
<b>Optional Accessories</b>			
	072BGLTSFK	Yoshimura LED Front Turn Signal Kit	
	073BG-HON-1	Yoshimura Plug-and-Play Turn Signal Wire Adapter	

\*\* Not shown on diagram.

**IMPORTANT:** Installation of this product requires the use of aftermarket M8 mounted turn signals.  
Not compatible with stock turn signals.

## Removal

1. Remove the two headlight screws on headlight housing and remove the headlight to access front turn signal wires.
2. Locate and disconnect left and right turn signal connectors.
3. Remove left and right triangle headlight brackets that the turn signals are attached to.
4. Remove the stock turn signals from the headlight brackets.



## Installation

1. Insert outside turn signal plate and inside turn signal plate into the triangle headlight bracket and install aftermarket turn signal. Secure using turn signal washer and nut.
2. Repeat steps for opposite side.
3. Re-install left and right triangle headlight brackets.
4. Route turn signal wires through headlight housing and re-connect left and right turn signal connectors.

Note: 073BG-HON-1 turn signal adapter wires are available for purchase separately for direct plug-and-play alternative with Yoshimura LED turn signals.

5. Re-install headlight onto headlight housing using opposite steps of removal.
6. Check for proper function of turn signals and that all components are secure prior to riding. Adjust turn signal rotation as needed and tighten turn signal nut.

