



YOSHIMURA


RESEARCH&DEVELOPMENT OF AMERICA,

5420 DANIELS STREET STE A, CHINO CA., 91710 · (800) 634-9166 · (909) 628-4722 · FAX (909) 591-2198

www.yoshimura-rd.com

TURN SIGNAL ADAPTER PLATES

Yamaha MT-03 073BG133300

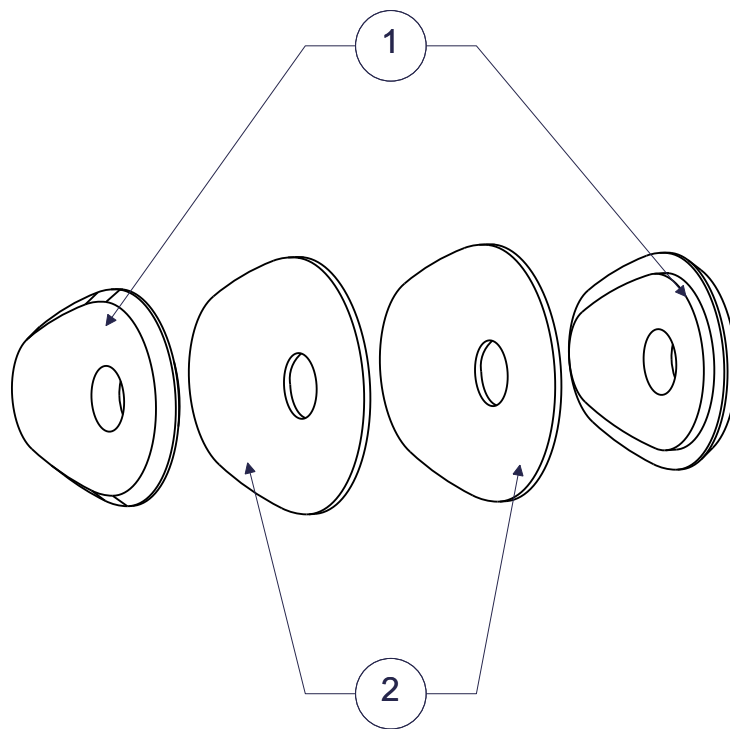

No.	Item	Description	Qty.
1	073BG133300-OUT	Outer Turn Signal Plate	2
2	073BG133300-IN	Metal Inner Plate	2
Optional Recommended Accessories			
	072BGLTSFK	Yoshimura LED Front Turn Signal Kit	
	073BG-YAM-4	Yoshimura Plug-and-Play Turn Signal Wire Adapter	

IMPORTANT: Installation of this product requires the use of aftermarket M8 mounted turn signals.

Removal

1. Remove the meter cover.
2. Disconnect and remove the meter display assembly (3 screws).
3. Locate and disconnect turn signal connectors and remove turn signals from the turn signal holders.

Installation

1. Insert outer turn signal plates onto the outside of turn signal holder where the stock turn signal was removed and the metal inner plate on the inside. Install aftermarket turn signal and secure using turn signal, washer, and nut.
2. Repeat steps for opposite side turn signal holder.
3. Connect the turn signal connectors to the wiring harness.

Note: 073BG-YAM-4 turn signal adapter wires are available for purchase separately for direct plug-and-play alternative with Yoshimura LED turn signals.

4. Re-install the meter display assembly and meter cover using the reverse steps of removal.
5. Check for proper function of turn signals and that all components are secure prior to riding. Adjust turn signal rotation as needed and tighten turn signal nut.