



YOSHIMURA


RESEARCH&DEVELOPMENT OF AMERICA,

5420 DANIELS STREET STE A, CHINO CA., 91710 · (800) 634-9166 · (909) 628-4722 · FAX (909) 591-2198

www.yoshimura-rd.com

MICRO TURN SIGNAL ADAPTER PLATES

Kawasaki Z900RS 073BG149500

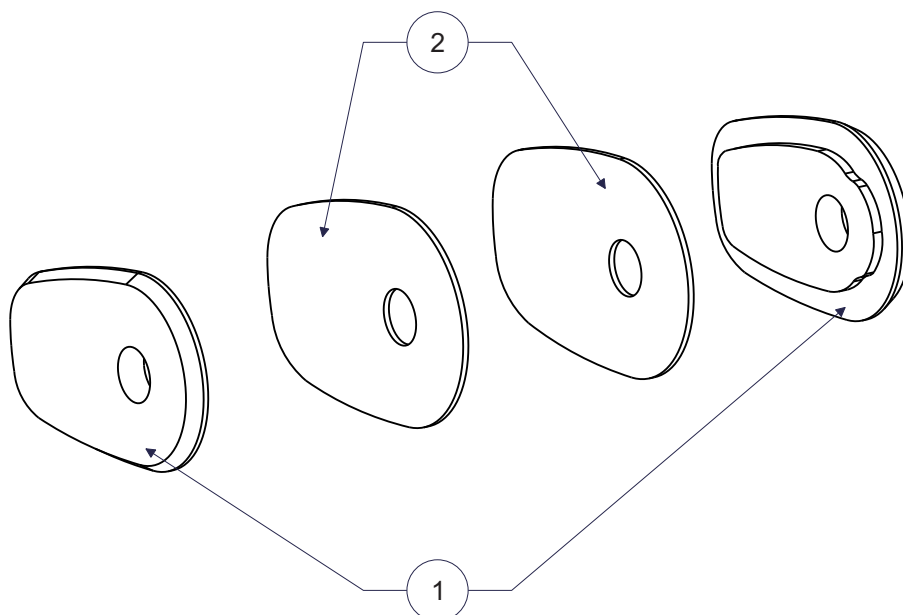

No.	Item	Description	Qty.
1	073BG149500-OUT	Outer Turn Signal Plate	2
2	073BG149500-IN	Metal Inner Plate	2
<i>Optional Recommended Accessories</i>			
	072BGLTSFK	Yoshimura LED Front Turn Signal Kit	
	073BG-KAW	Yoshimura Plug-and-Play Turn Signal Wire Adapter	


IMPORTANT: Installation of this product requires the use of aftermarket M8 mounted turn signals.

Removal

1. Remove the headlight bezel.
2. Disconnect and remove the headlight from the headlight housing to access the front turn signal wires.
3. Locate and disconnect left and right turn signal connectors. Remove turn signals from the turn signal holder.
4. Cut the turn signal wires 4" from the turn signal connector, not the wiring harness.

Installation

1. Insert outer turn signal plates onto the outside of turn signal holder where the stock turn signal was removed and the metal inner plate on the inside. Install aftermarket turn signal and secure using turn signal, washer, and nut.

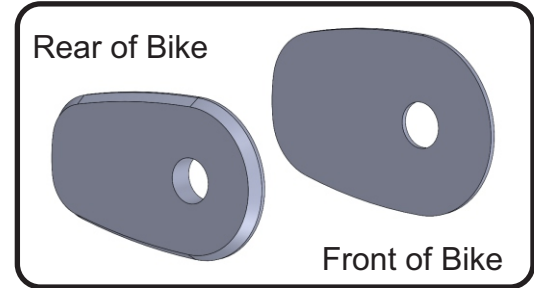

RIGHT SIDE EXAMPLE SHOWN

2. Repeat steps for opposite side turn signal holder.
3. Connect the turn signal connectors to the wiring harness.

Note: 073BG-KAW turn signal adapter wires are available for purchase separately for direct plug-and-play alternative with Yoshimura LED turn signals.

4. Re-install the headlight assembly and bezel.
5. Check for proper function of turn signals and that all components are secure prior to riding. Adjust turn signal rotation as needed and tighten turn signal nut.