



YOSHIMURA

RESEARCH&DEVELOPMENT OF AMERICA, INC.

5420 DANIELS STREET STE A, CHINO CA., 91710 · (800) 634-9166 · (909) 628-4722 · FAX (909) 591-2198

www.yoshimura-rd.com

FENDER ELIMINATOR KIT

075BG117300





Suzuki GSX-8T / GSX-8TT




THIS PRODUCT IS NOT DOT APPROVED.




Yoshimura R&D of America, Inc. is not liable or responsible for any resulting event caused by the installation of this product. Check with local laws and regulations for compliance prior to installation and use. This product is not intended for use on public highways.



#1 Qty 1  11730-FEBKT Fender Eliminator Bracket	#2 Qty 1  HB025024-E Tail Light	#3 Qty 1  FE-LP-BKT License Plate Bracket
#4 Qty 1  H-2158T Wire Debris Cover	#5 Qty 2  M6X12FS 6mm x 12mm Flat Head Allen Screw	#6 Qty 4  M6X10BHS 6mm x 10mm Button Head Screw

Assembly Diagram

#7 Qty 2  6MMLN-SS 6mm Nylon Lock Nut	#8 Qty 2  6MMWASHER-SS 6mm Stainless Washer
--	---

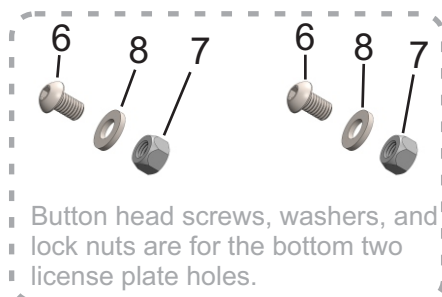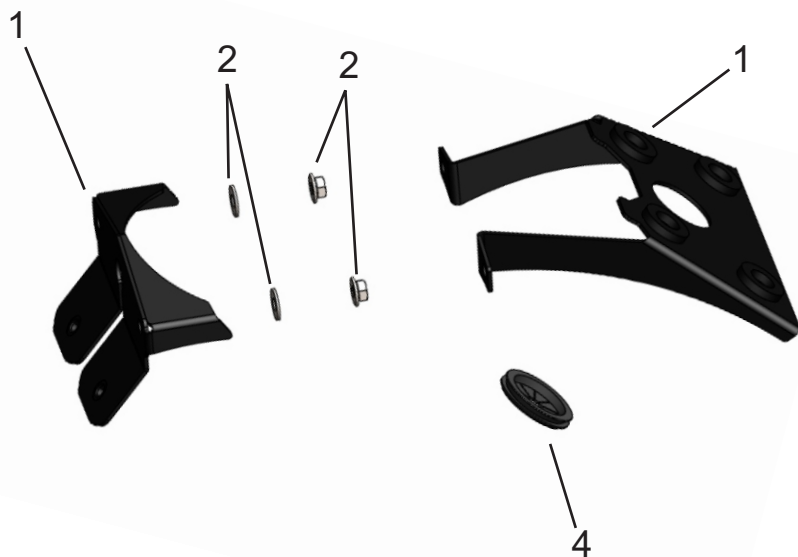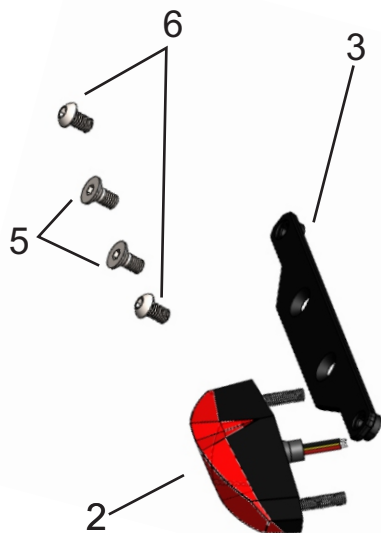

IMPORTANT NOTE:


This kit does not include turn signal brackets to install OEM or aftermarket turn signals. Ensure you have all necessary components prior to beginning installation.

Removal

1. Remove passenger seat.
2. Locate and disconnect license plate light and turn signal connectors.
3. While securely supporting the stock fender assembly, remove the four bolts securing the fender assembly to the frame. Carefully remove the stock fender assembly making sure not to damage the connectors in the process.


Note¹: Take precaution when removing rear fender assembly as it is still attached to the under-tail in the three locations shown below, after the four bolts are removed.

Note²: The stock fender bolts will be reused.

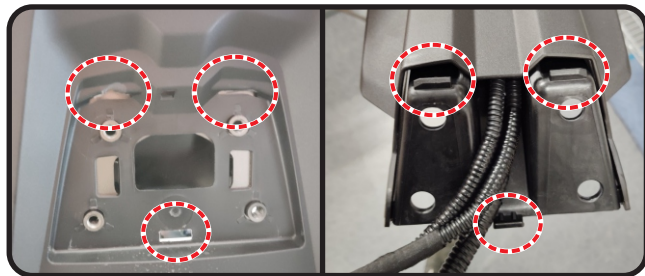

Installation

1. Install *HB025024-E*, tail light to *11730-FEBKT*, fender bracket using the tail light nuts.

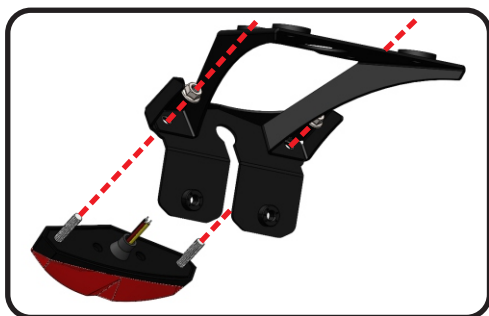

2. Install *FE-LP-BKT*, license plate bracket onto *11730-FEBKT*, fender bracket using *M6X12FS*, flat head allen screws.




NOTE: For turn signal kit installation, see appendix below

**** [OEM Turn Signal Bracket](#) ****

**** [Standard / Sequential LED Turn Signal Kit](#) ****

**** [Micro LED Turn Signal Kit](#) ****

3. Install *H-2158T*, wire cover into *11730-FEBKT*, fender bracket.

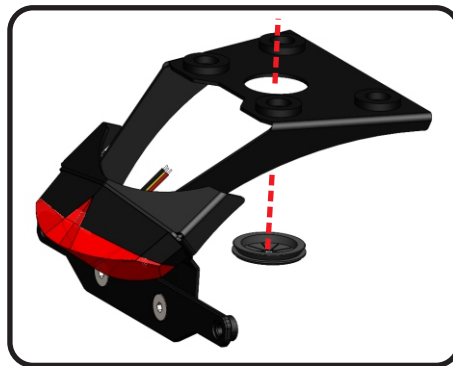

4. Install assembled fender eliminator by routing license plate light and turn signal wires through *H-2158T*, wire cover on fender eliminator bracket and through under-tail. Secure fender bracket to frame using the stock fender bolts. Torque to factory specification.

Note: *M6X10BHS*, button head screws, will be used to secure the license plate to *FE-LP-BKT*, license plate bracket. *6MMLN-SS*, nylon lock nuts and *6MMWASHER-SS*, washers are for the bottom license plate holes.

5. Route wires in stock location and re-connect license plate light and turn signal connectors.
6. Re-install passenger seat.
7. Check for proper function of license plate light, turn signals, brake light, and that all brackets and components are secure prior to riding.