



# YOSHIMURA

RESEARCH&DEVELOPMENT OF AMERICA, INC.


5420 DANIELS STREET STE A, CHINO CA., 91710 · (800) 634-9166 · (909) 628-4722 · FAX (909) 591-2198

**[www.yoshimura-rd.com](http://www.yoshimura-rd.com)**

## **FENDER ELIMINATOR KIT**

**075BG121500**



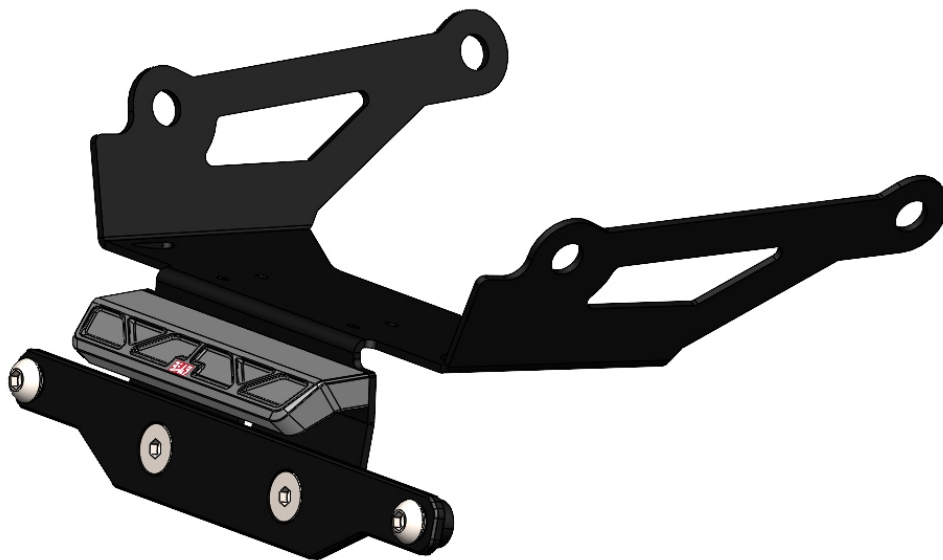






**Honda CB 1000 Hornet SP**





**THIS PRODUCT IS NOT DOT APPROVED.**

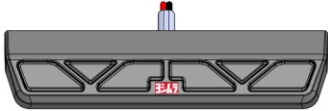Yoshimura R&D of America, Inc. is not liable or responsible for any resulting event caused by the installation of this product. Check with local laws and regulations for compliance prior to installation and use. This product is not intended for use on public highways.



<p>x1</p>  <p>12150-FEBKT Fender Eliminator Bracket</p>	<p>x1</p>  <p>FE-LP-BKT License Plate Bracket</p>	<p>x1</p>  <p>075BG-LH-H3 License Plate Light</p>
<p>x4</p>  <p>M6X10BHS 6mm x 10mm Button Head Screw</p>	<p>x2</p>  <p>M4X6BHS 4mm x 6mm Button Head Screw</p>	<p>x2</p>  <p>M6X12FS-SS 6mm x 12mm Flat Head Screw</p>
<p>x2</p>  <p>ZT-400 Cable Tie</p>	<p>x2</p>  <p>6MMWASHER-SS 6mm Washer</p>	<p>x2</p>  <p>6MMLN-SS Nylon Lock Nut</p>

## Assembly Diagram

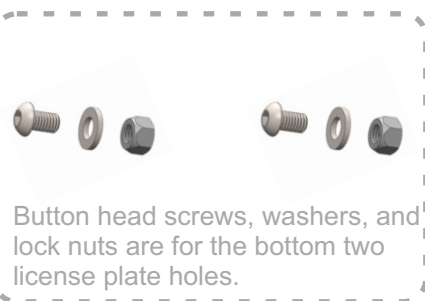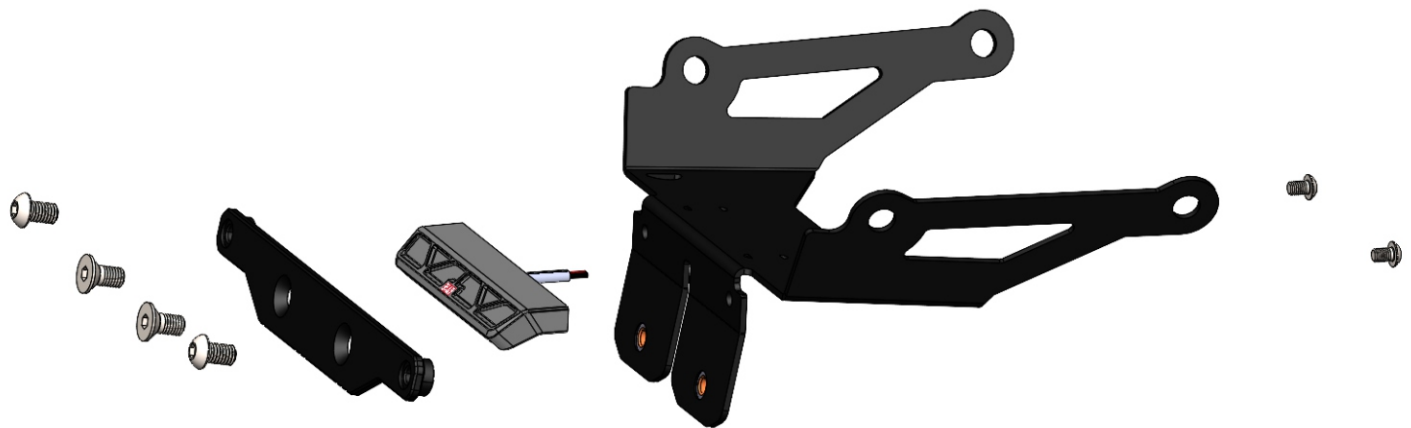

**IMPORTANT NOTE:**

***This kit does not include turn signal brackets to install OEM or aftermarket turn signals.***


***Ensure you have all necessary components prior to beginning installation.***

## Removal


1. Remove the rider and passenger seat.
2. Remove the upper tail fairing.
3. Remove both under-tail side fairings.
4. Locate and disconnect turn signal and license plate light connectors.
5. While supporting the rear fender assembly, remove the four fender bolts.

## Installation

1. Install *075BG-LH-H3*, Yoshimura license plate light onto *12150-FEBKT*, Yoshimura fender eliminator bracket using *M4X6BHS*, button head screws provided in the kit.

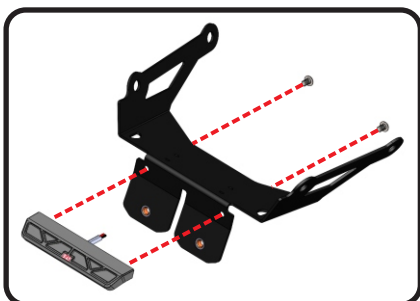


2. Install *FE-LP-BKT*, license plate bracket onto the fender eliminator bracket using *M6X12FS-SS*, flat head screws.

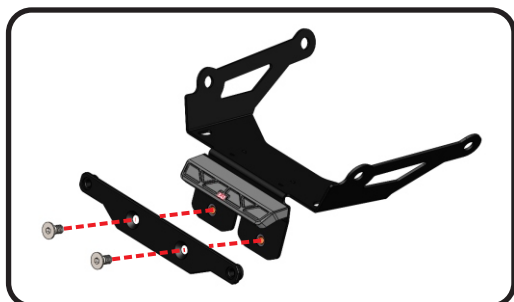

Note: *M6X10BHS*, button head screws, will be used to secure the license plate to *FE-LP-BKT*, license plate bracket. *6MMLN-SS*, nylon lock nuts and *6MMWASHER-SS*, washers are for the bottom license plate holes.

3. Route *ZT-400*, cable ties through the crescent hole slots in the fender eliminator bracket. Do not tighten at this time.

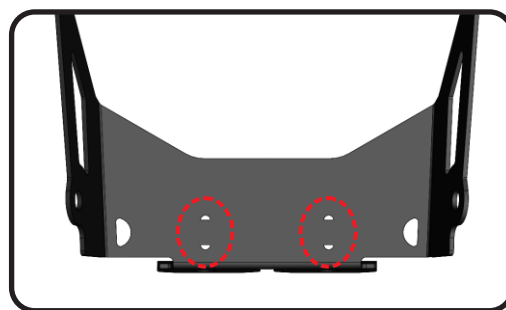

4. Route the license plate light wires through the under-tail.
5. Secure fender eliminator bracket assembly to frame using the four stock fender bolts. Torque fender bolts to factory specifications.
6. Connect the license plate light to the wiring harness and tighten the cable ties.
7. Re-install the tail fairings using the reverse steps of removal.
8. Check for proper function of license plate light, turn signals, brake light, and that all brackets and components are secure prior to riding.