



YOSHIMURA

RESEARCH&DEVELOPMENT OF AMERICA, INC.

5420 DANIELS STREET STE A, CHINO CA., 91710 · (800) 634-9166 · (909) 628-4722 · FAX (909) 591-2198

www.yoshimura-rd.com

FENDER ELIMINATOR KIT




075BG124010
Honda Africa Twin



THIS PRODUCT IS NOT DOT APPROVED.


Yoshimura R&D of America, Inc. is not liable or responsible for any resulting event caused by the installation of this product. Check with local laws and regulations for compliance prior to installation and use. This product is not intended for use on public highways.



#1  Qty. 1 12401-FEBKT1 Fender Eliminator Bracket	#2  Qty. 1 FE-LP-BKT License Plate Bracket	#3  Qty. 1 075BG-LH-H3 License Plate Light	
#4  Qty. 1 12551-TSB-B Turn Signal Bracket	#5  Qty. 2 M6X12FS-SS 6mm x 12mm Flat Head Screw	#6  Qty. 4 M6X10BHS 6mm x 10mm Button Head Screw	
#7  Qty. 2 6MMWASHER-SS Stainless Washer	#8  Qty. 2 6MMLN-SS Nylon Lock Nut	#9  Qty. 2 M4X6BHS 4mm x 6mm Button Head Screw	#10  Qty. 1 ZT-400 Cable Tie

Service Parts & Accessories	
License Plate Frame (070BG-LPF-K)	Standard Turn Signal Kit (075BG-STD-H-K)
Sequential Turn Signal Kit (075BG-SEQ-H-K)	Micro Turn Signal Kit (075BG-MIC-D-K)
Black Ti Bolts (M6X10-TI-BLK-K)	Gold Ti Bolts (M6X10-TI-GOLD-K)
Oil Slick Rainbow Bolts (M6X10-TI-OS-K)	

Assembly Diagram

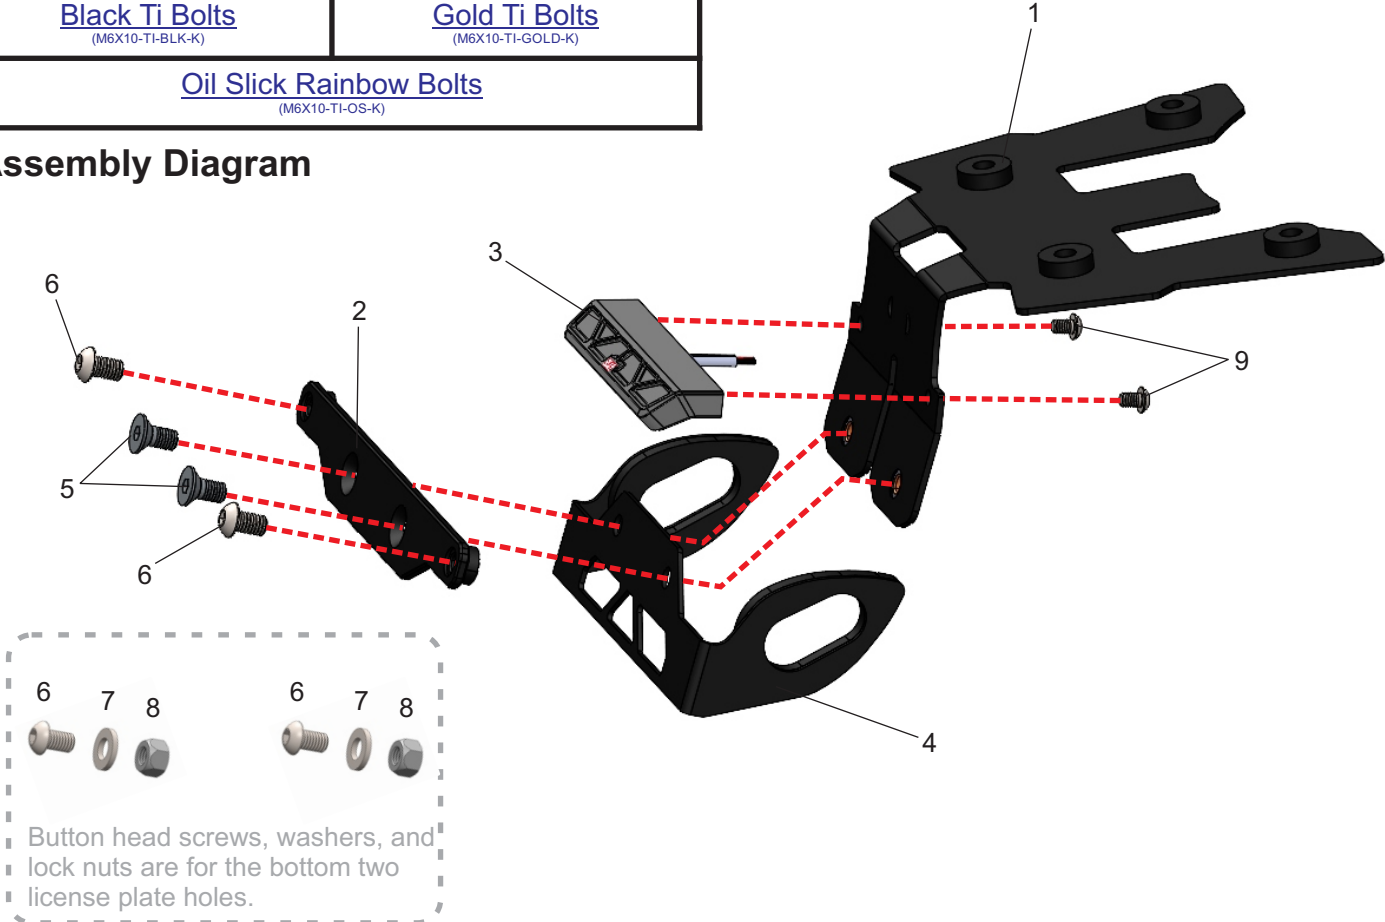


Removal


1. Remove the passenger seat.
2. Locate and disconnect the license plate light and turn signal connectors.
3. While securely supporting the stock fender assembly, remove the four bolts securing the fender assembly to the sub-frame. Carefully remove the stock fender assembly, making sure not to damage connectors in the process.
4. Disassemble and remove left and right turn signals from the stock fender assembly.

Installation


1. Install *075BG-LH-H3*, License Plate Light to *12401-FEBKT1*, Fender Eliminator Bracket using *M4X6BHS*, Button Head Screws.

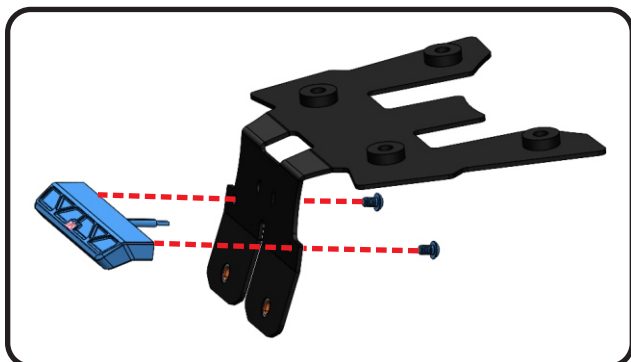

2. Insert *ZT-400*, Cable Tie into the crescent holes of *12401-FEBKT1*, Fender Eliminator Bracket. Do not tighten at this time.

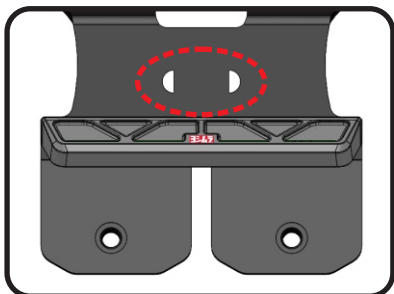


3. Install *12401-FEBKT1*, Fender Eliminator Bracket using the four stock fender bolts and washers.
4. Install stock turn signals onto *12551-TSB-B*, OEM Turn Signal Bracket using the rubber stems and stock mounting hardware.

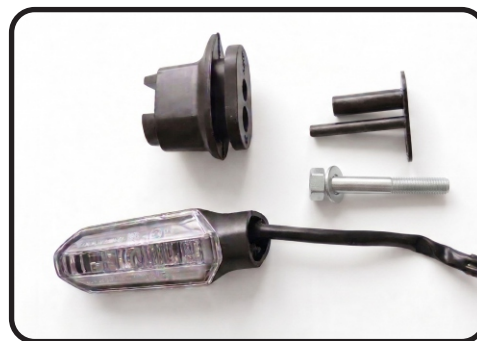

5. Install *12551-TSB-B*, OEM Turn Signal Bracket in between *FE-LP-BKT*, License Plate Bracket and *12401-FEBKT1*, Fender Eliminator Bracket using *M6X12FS-SS*, Flat Head Screws.

Note: *M6X10BHS*, Button Head Screws, will be used to secure the license plate to *FE-LP-BKT*, License Plate Bracket. *6MMLN-SS*, Nylon Lock Nut and *6MMWASHER-SS*, Washer are for the bottom license plate holes.

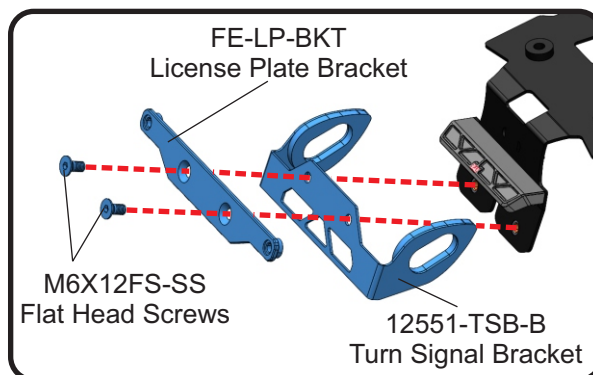

NOTE: For turn signal kit installation, see appendix below.

**** [Standard / Sequential LED Turn Signal Kit](#) ****

**** [Micro LED Turn Signal Kit](#) ****

6. Route license plate light and turn signal wires through hole in fender bracket and to the stock location. Re-connect license plate light and turn signal connectors.
7. Using *ZT-400*, Cable Tie, secure license plate light and turn signal wires to the Fender Eliminator Bracket.
8. Re-install passenger seat.
9. Check for proper function of license plate light and turn signals and that all brackets and components are secure prior to riding.