



YOSHIMURA


RESEARCH&DEVELOPMENT OF AMERICA, INC.

5420 DANIELS STREET STE A, CHINO CA., 91710 · (800) 634-9166 · (909) 628-4722 · FAX (909) 591-2198

www.yoshimura-rd.com

FENDER ELIMINATOR KIT



075BG131000
Yamaha MT-10



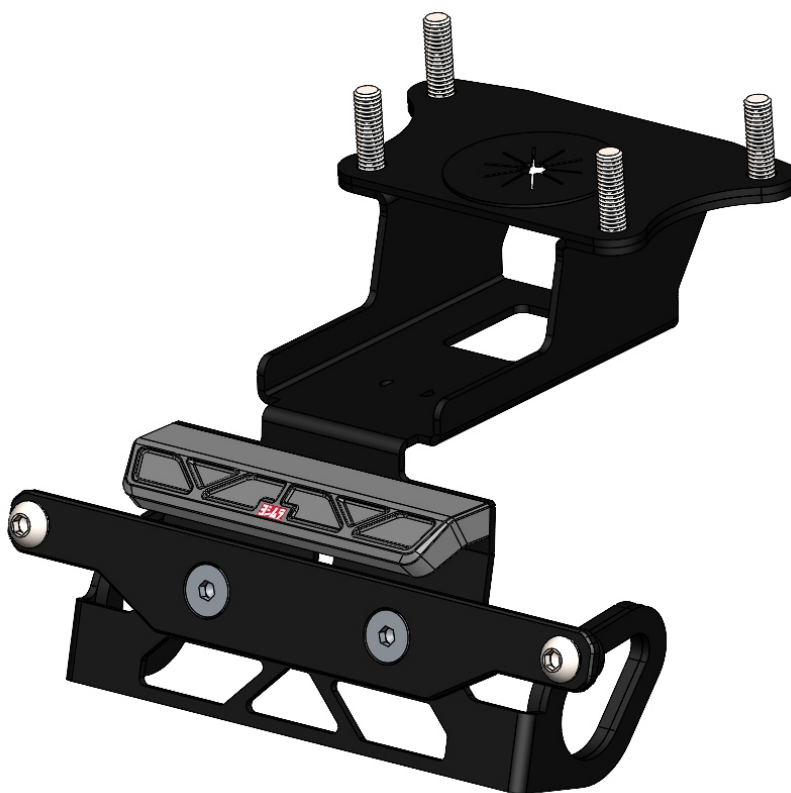


THIS PRODUCT IS NOT DOT APPROVED.

Yoshimura R&D of America, Inc. is not liable or responsible for any resulting event caused by the installation of this product. Check with local laws and regulations for compliance prior to installation and use. This product is not intended for use on public highways.



#1 Qty. 1  13100-FEBKT1 Fender Eliminator Bracket	#2 Qty. 1  FE-LP-BKT License Plate Bracket	#3 Qty. 1  13992-TSB-B1 Turn Signal Bracket
--	--	--

#4 Qty. 1  075BG-LH-Y2 License Plate Light	#5 Qty. 1  H-2158T-1 Wire Debris Cover	#6 Qty. 4  M6X20BHS-SS 6mm x 20mm Button Head Screw	#7 Qty. 4  M6X10BHS 6mm x 10mm Button Head Screw
#8 Qty. 2  M6X12FS-SS 6mm x 12mm Flat Head Screw	#9 Qty. 2  M4X6BHS 4mm x 6mm Button Head Screw	#10 Qty. 2  6MMLN-SS Nylon Lock Nut	#11 Qty. 2  6MMWASHER-SS Stainless Washer


Service Parts & Accessories	
License Plate Frame (070BG-LPF-K)	Standard Turn Signal Kit (075BG-STD-I-K)
Sequential Turn Signal Kit (075BG-SEQ-I-K)	Micro Turn Signal Kit (075BG-MIC-D-K)
Black Ti Bolts (M6X10-TI-BLK-K)	Gold Ti Bolts (M6X10-TI-GOLD-K)
Oil Slick Rainbow Bolts (M6X10-TI-OS-K)	

#12 Qty. 1



ZT-400
Cable Tie


Assembly Diagram

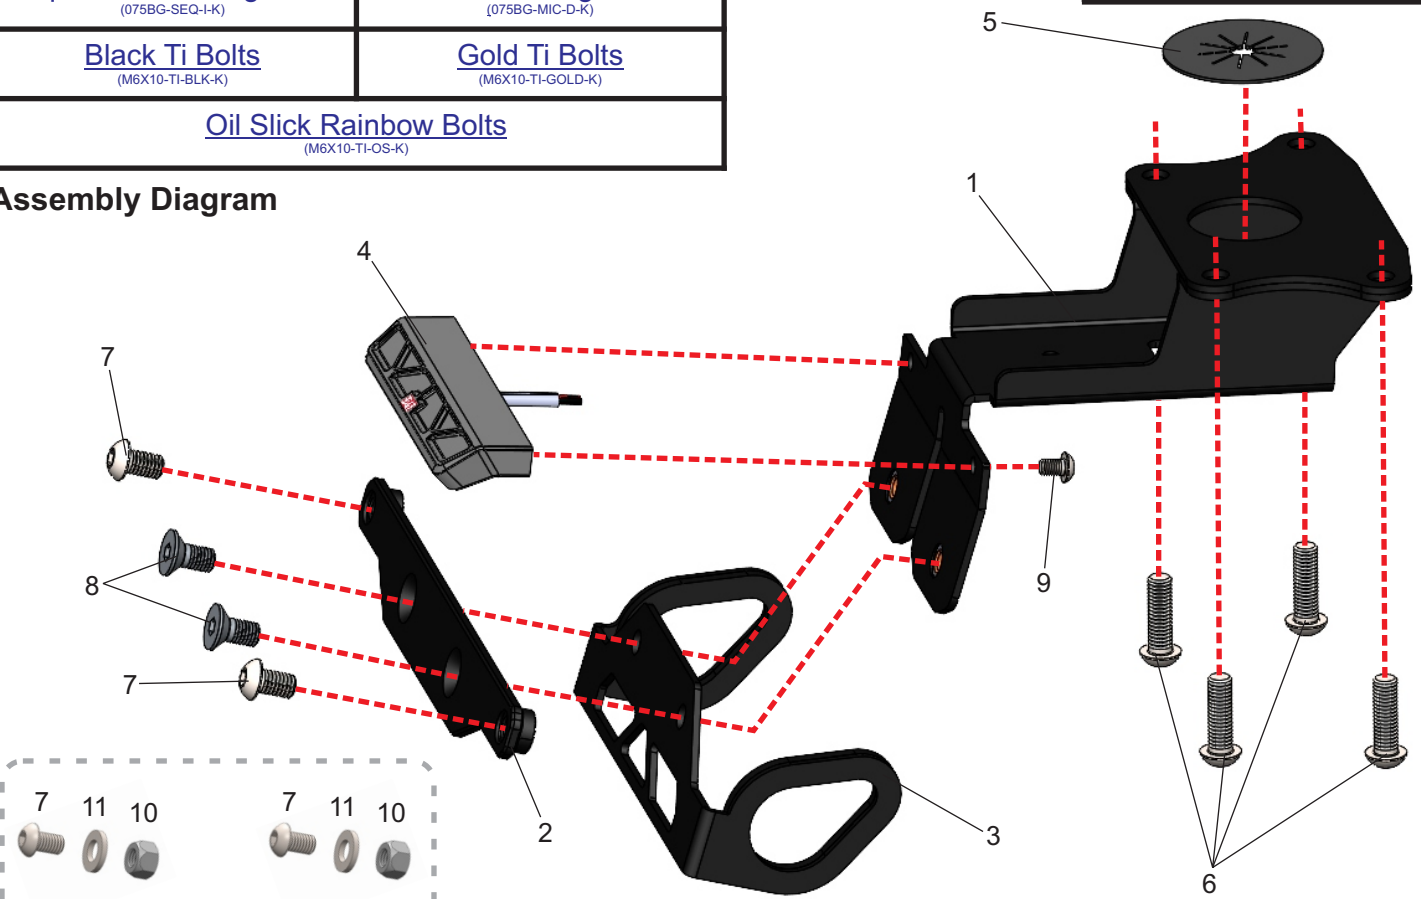

Button head screws, washers, and lock nuts are for the bottom two license plate holes.

Removal


1. Remove rider seat.
2. Remove the tail cowl above the tail light.

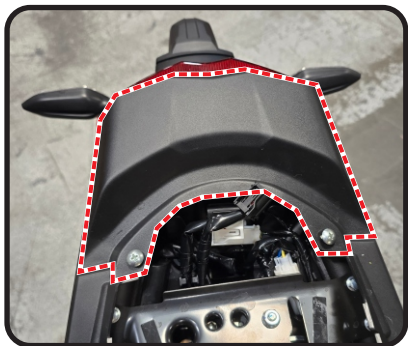


3. Remove the seat lock bracket to gain access to the lock nuts securing the rear fender assembly to the tail section.
4. Locate and disconnect the turn signal and tail license plate light connectors.
5. While supporting the stock fender assembly, remove the four lock nuts securing the fender assembly to the frame and carefully separate from the tail section.
6. Remove left and right turn signals from the stock fender assembly.

Installation


1. Install 075BG-LH-Y2, Yoshimura license plate light onto 13100-FEBKT1, fender eliminator bracket using M4X6BHS, button head screws provided in the kit.

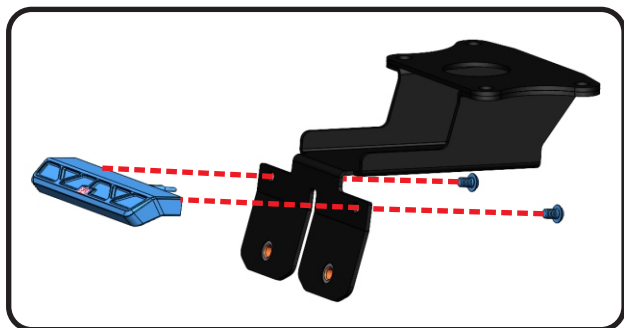


2. Install H-2158T-1, Wire Debris Cover onto 13100-FEBKT1, Fender Eliminator Bracket.

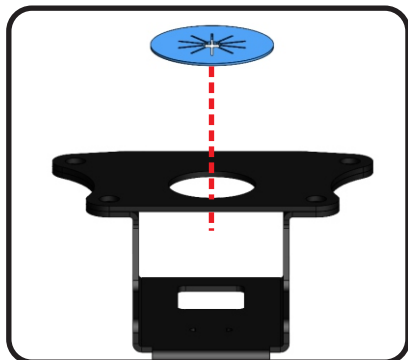

3. Insert ZT-400, Cable Tie into the crescent holes of 13100-FEBKT1, Fender Eliminator Bracket. Do not tighten at this time.

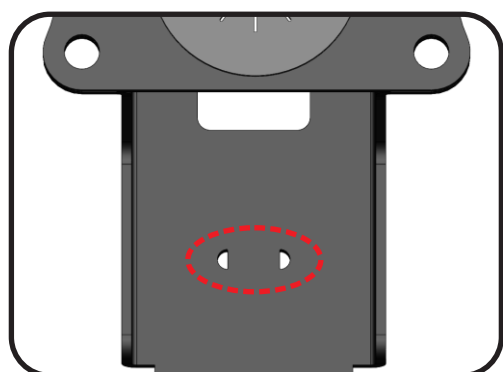


4. Install 13100-FEBKT1, fender eliminator bracket using M6X20BHS-SS, Button Head Screws along with the stock nuts.

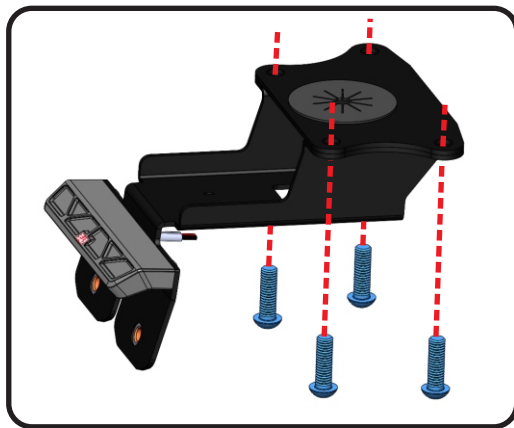

5. Install the stock turn signals onto 13992-TSB-B1, OEM Turn Signal Bracket using all stock mounting hardware.
6. Install 13992-TSB-B1, OEM Turn Signal Bracket in between FE-LP-BKT, License Plate Bracket and 13100-FEBKT1, Fender Eliminator Bracket using M6X12FS-SS, Flat Head Screws.

Note: M6X10BHS, Button Head Screws will be used to secure the license plate to FE-LP-BKT, License Plate Bracket. 6MMLN-SS Nylon Lock Nuts and 6MMWASHER-SS, Washers are for the bottom license plate holes.

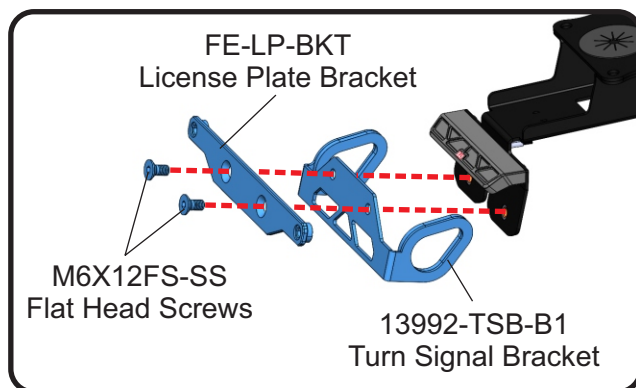

NOTE: For turn signal kit installation, see appendix below.

**** [Standard / Sequential LED Turn Signal Kit](#) ****

**** [Micro LED Turn Signal Kit](#) ****

7. Route the tail light and turn signal wires through the fender eliminator bracket and inside the tail section.
8. Connect the turn signal and license plate wires to the wiring harness.
9. Tighten ZT-400, Cable Tie to secure turn signal and license plate wires to the fender eliminator bracket.
10. Re-install the seat.
11. Check for proper function of license plate light, turn signals, brake light, and that all brackets and components are secure prior to riding.