



YOSHIMURA


RESEARCH&DEVELOPMENT OF AMERICA,

5420 DANIELS STREET STE A, CHINO CA., 91710 · (800)634-9166 · (909)628-4722 · FACSIMILE (909)591-2198

www.yoshimura-rd.com

FENDER ELIMINATOR KIT




075BG137200
Yamaha R7

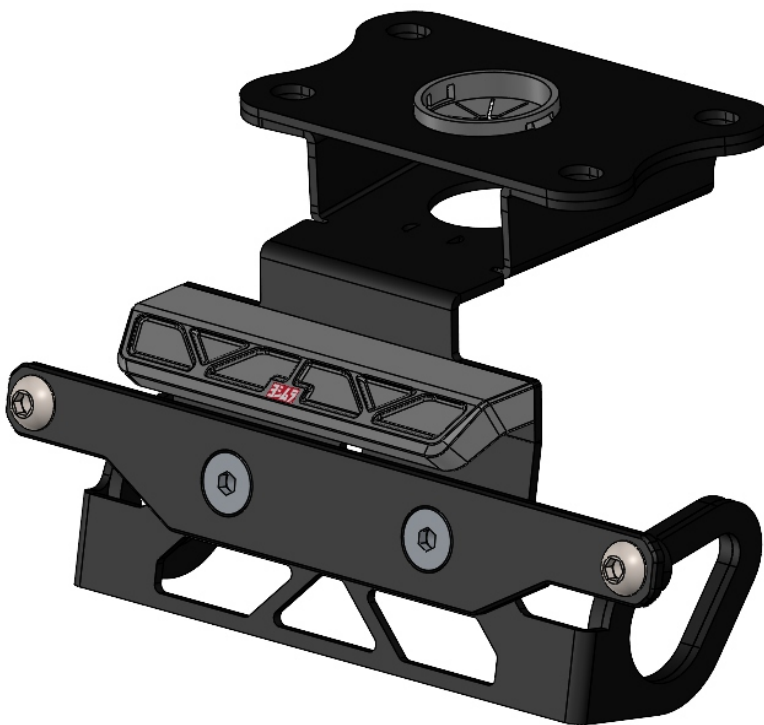

THIS PRODUCT IS NOT DOT APPROVED.


Yoshimura R&D of America, Inc. is not liable or responsible for any resulting event caused by the installation of this product. Check with local laws and regulations for compliance prior to installation and use. This product is not intended for use on public highways.

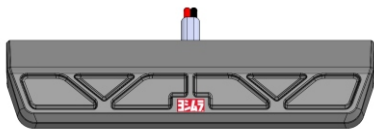

#1 Qty. 1  13720-FEBKT2 Fender Eliminator Bracket	#2 Qty. 1  FE-LP-BKT License Plate Bracket	#3 Qty. 1  075BG-LH-Y4 License Plate Light	
#4 Qty. 1  13992-TSB-B1 OEM Turn Signal Bracket	#5 Qty. 1  H-2158 Wire Debris Cover	#6 Qty. 1  ZT-400 Cable Tie	#7 Qty. 2  M6X12FS-SS 6mm x 12mm Flat Head Screw
#8 Qty. 4  M6X10BHS 6mm x 10mm Button Head Screw	#9 Qty. 2  M4X6BHS 4mm x 6mm Button Head Screw	#10 Qty. 2  6MMWASHER-SS Stainless Washer	#11 Qty. 2  6MMLN-SS Nylon Lock Nut

Service Parts & Accessories	
License Plate Frame (070BG-LPF-K)	Standard Turn Signal Kit (075BG-STD-I-K)
Sequential Turn Signal Kit (075BG-SEQ-I-K)	Micro Turn Signal Kit (075BG-MIC-D-K)
Black Ti Bolts (M6X10-TI-BLK-K)	Gold Ti Bolts (M6X10-TI-GOLD-K)
Oil Slick Rainbow Bolts (M6X10-TI-OS-K)	

Assembly Diagram

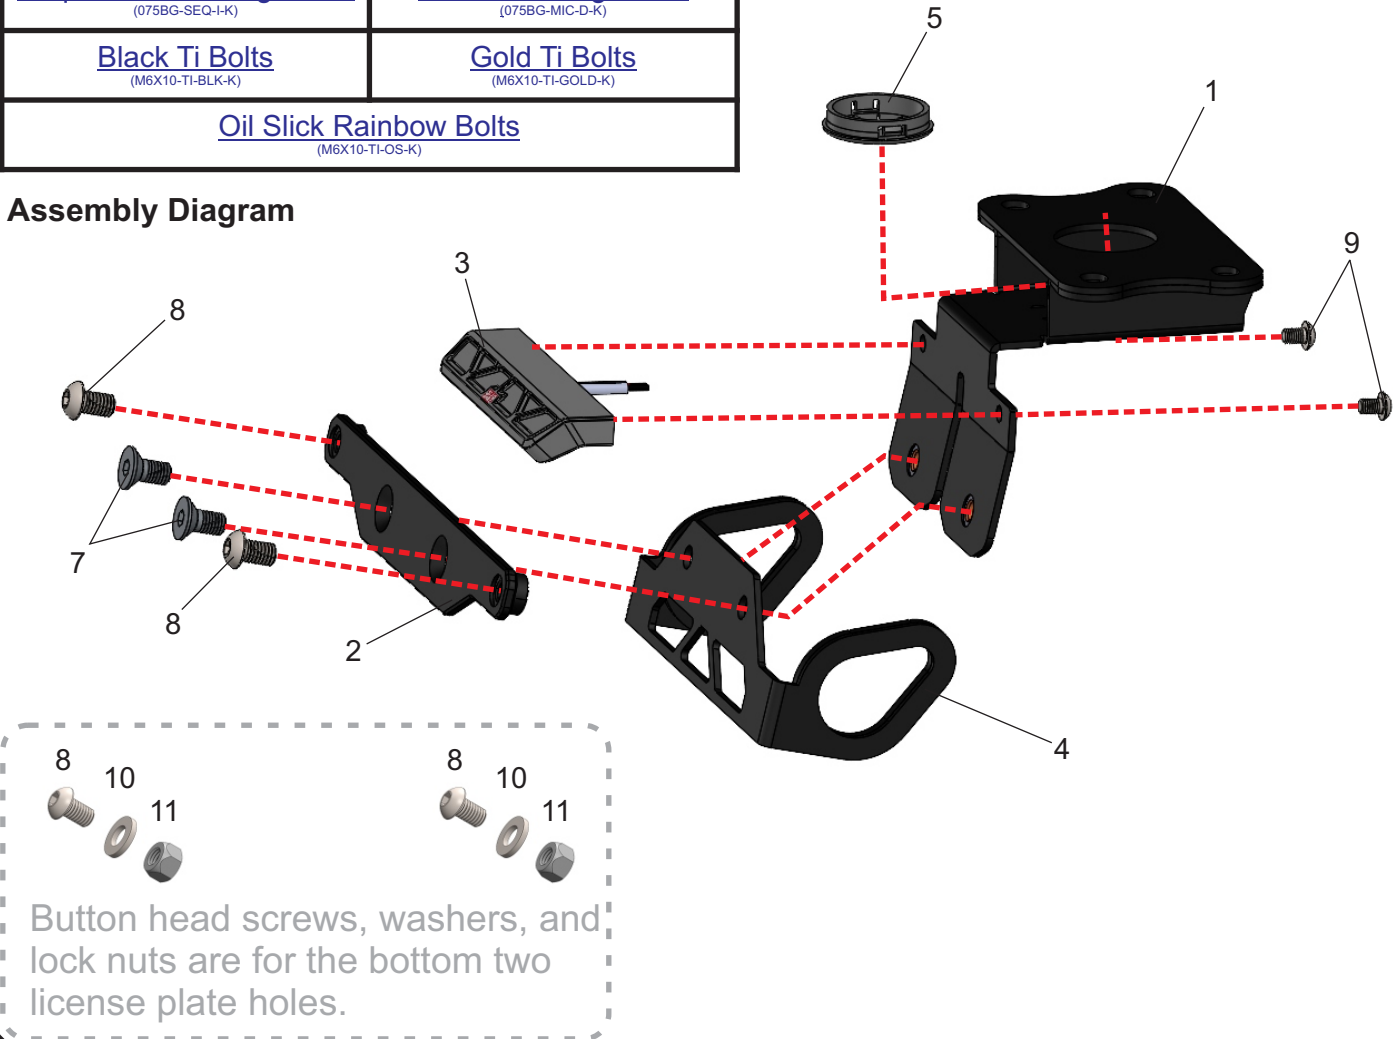


Removal

1. Remove the passenger seat.
2. Remove the center panel between passenger and rider seat (2 push pins).




3. Remove the rider seat.
4. Remove the upper tail cover above the tail light.

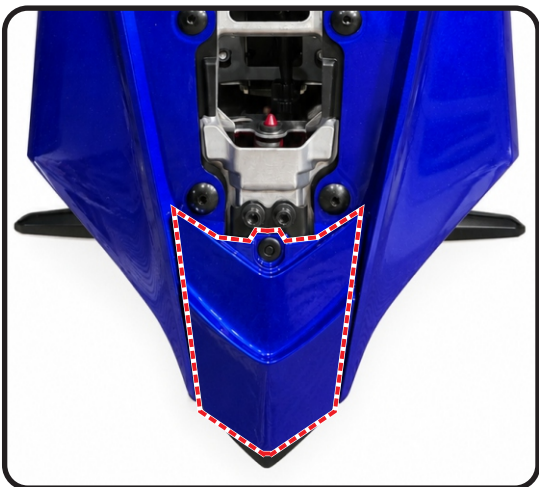

5. Remove the top-side left and right tail cowl.
6. Remove the hardware that secure the under-tail side panels and then detach the rear portion of the under-tail panels from the sub-frame.
7. Locate and disconnect license plate light and turn signal wires.


Note: Remove the tool tray for easier access to the turn signal and plate light wires if needed (2 screws).

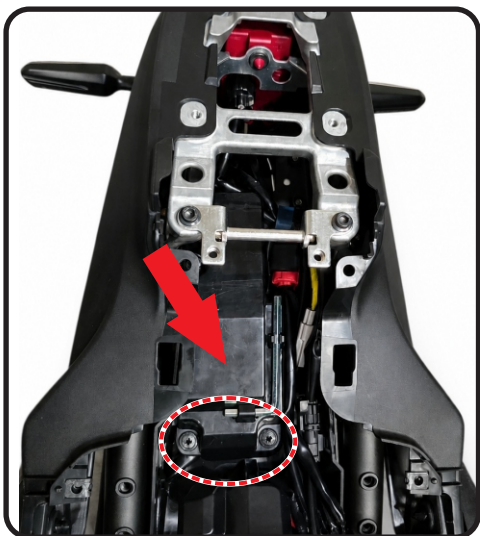


8. While securely supporting the stock fender assembly, remove the four bolts securing the fender assembly to sub-frame. Carefully remove the stock fender assembly, making sure not to damage the license plate light wire and turn signal connectors.
9. Disassemble the stock fender assembly and remove left and right turn signals.

Installation


1. Install 075BG-LH-Y4, License Plate Light onto 13720-FEBKT2, Fender Eliminator Bracket using M4X6BHS, button head screws.

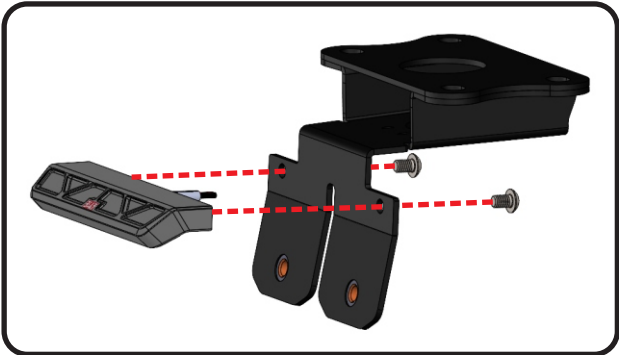

2. Insert H-2158, Wire Debris Cover into 13720-FEBKT2, Fender Eliminator Bracket from below.

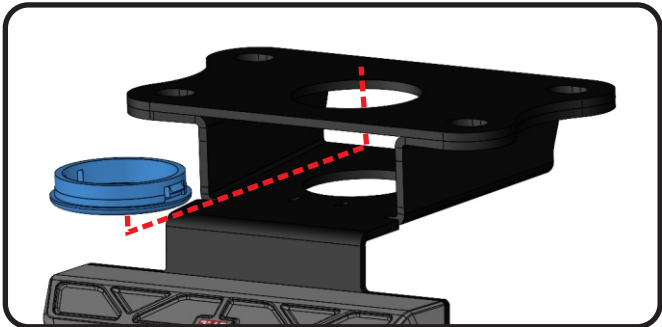

3. Install OEM turn signals onto 13992-TSB-B1, OEM turn signal bracket using the stock mounting hardware.
4. Route ZT-400, Cable Tie through the crescent holes of 13720-FEBKT2, Fender Eliminator Bracket. Do not tighten at this time.

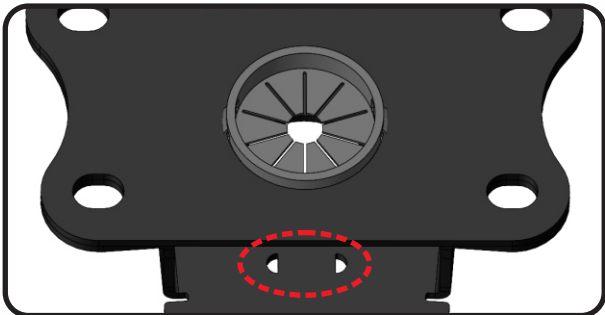


5. Install 13720-FEBKT2, Fender Eliminator Bracket to sub-frame using the stock bolts.
6. Install 13992-TSB-B1, OEM Turn Signal Bracket in between FE-LP-BKT, License Plate Bracket and 13720-FEBKT2, Fender Eliminator Bracket using M6X12FS-SS, Flat Head Screws as shown in the diagram.

Note: For turn signal kit installation, see appendix below.

** [Standard / Sequential LED Turn Signal Kit](#) **

** [Micro LED Turn Signal Kit](#) **

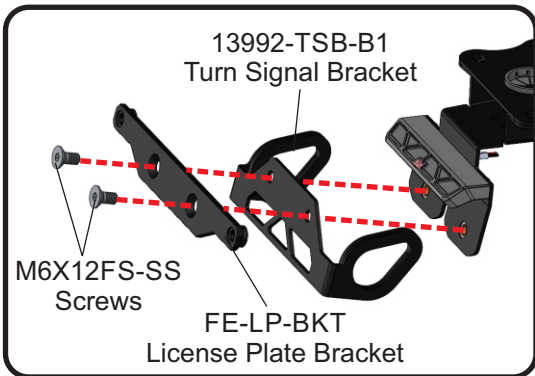

Note: M6X10BHS, Button Head Screws will be used to secure the license plate to FE-LP-BKT, License Plate Bracket. 6MMLN-SS, Nylon Lock Nuts and 6MMWASHER-SS, Washers are for the bottom license plate holes.

7. Route the license plate light and turn signal wires through the fender eliminator bracket, into the tail section, and reconnect to the wiring harness.
8. Tighten *ZT-400*, Cable Tie to secure wires to the fender eliminator bracket.
9. Re-install all body work using the reverse steps of removal.
10. Re-install the rider seat.
11. Re-install the center panel and passenger seat.
12. Check for proper function of license plate light, turn signals, brake light, and that all brackets and components are secure prior to riding.