



# YOSHIMURA

RESEARCH&DEVELOPMENT OF AMERICA, INC.

5420 DANIELS STREET STE A, CHINO CA., 91710 · (800) 634-9166 · (909) 628-4722 · FAX (909) 591-2198

[www.yoshimura-rd.com](http://www.yoshimura-rd.com)

## **FENDER ELIMINATOR KIT**

**075BG139000**  
**Yamaha R9**



**THIS PRODUCT IS NOT DOT APPROVED.**

Yoshimura R&D of America, Inc. is not liable or responsible for any resulting event caused by the installation of this product. Check with local laws and regulations for compliance prior to installation and use. This product is not intended for use on public highways.



x1



13900-FEBKT  
Fender Eliminator  
Bracket

x1



FE-LP-BKT  
License Plate Bracket

x1



075BG-LH-Y4  
License Plate Light

x4



M6X10BHS  
6mm x 10mm  
Button Head Screw

x2



M4X6BHS  
4mm x 6mm  
Button Head Screw

x2



M6X12FS-SS  
6mm x 12mm  
Flat Head Screw

x1




H-2158T  
Wire Debris Cover

x2



6MMWASHER-SS  
6mm Washer

x2




6MMLN-SS  
6mm Lock Nut

x1



ZT-400  
Cable Tie

### Assembly Diagram

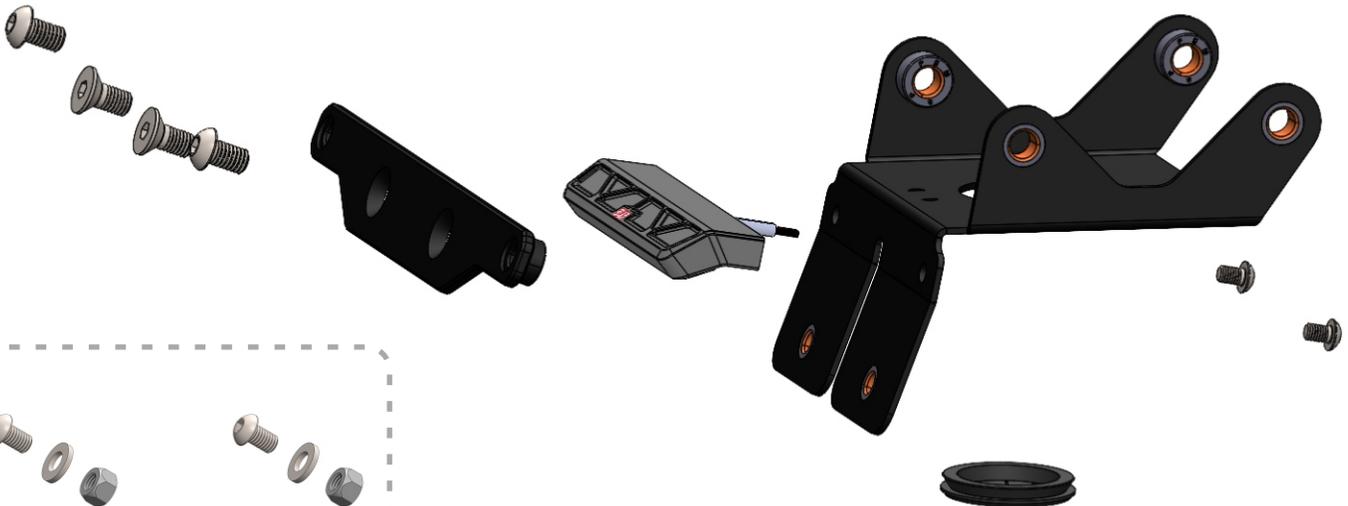

Button head screws, washers, and lock nuts are for the bottom two license plate holes.

**IMPORTANT NOTE:**

***This kit does not include turn signal brackets to install OEM or aftermarket turn signals. Ensure you have all necessary components prior to beginning installation.***

**Removal**


1. Remove both the rider and passenger seat.
2. Remove the small black fairing above the tail light.




3. Remove the tail's side fairings to gain access to the fender and wire connectors.
4. Locate and disconnect license plate light and rear turn signal connectors.
5. While supporting the stock fender assembly, remove the four fender bolts and carefully remove the fender assembly making sure not to damage turn signal connectors.

**Installation**

1. Install *075BG-LH-Y4*, license plate light onto *13900-FEBKT*, fender eliminator bracket using *M4X6MMBHS*, button head screws.

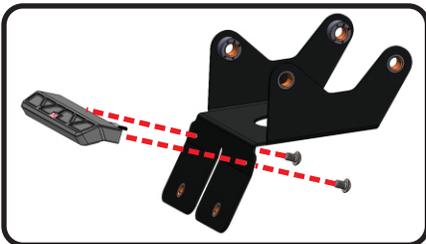

2. Install *FE-LP-BKT*, License Plate Bracket using *M6X12FS-SS*, flat head screws.

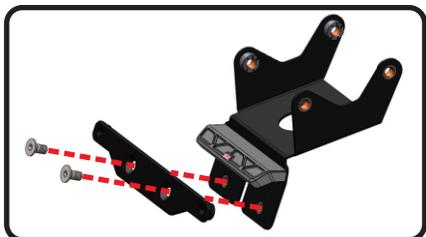


Note: *M6X10BHS*, button head screws will be used to secure the license plate to *FE-LP-BKT*, License Plate Bracket. *6MMLN-SS*, Nylon Lock Nuts and *6MMWASHER-SS*, Washers are for the bottom license plate holes.

3. Install *H-2158T*, wire debris cover into the fender eliminator bracket and route license plate light wires through the grommet hole.



4. Route *ZT-400*, cable tie through the fender eliminator bracket's crescent holes and tighten

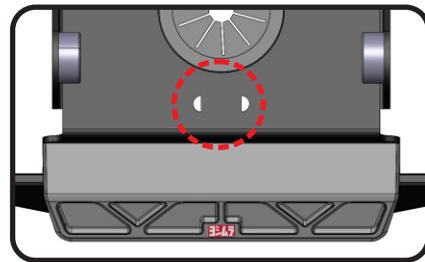

5. Install *13900-FEBKT*, fender eliminator bracket in the stock fender's mounting location using the stock four fender bolts. Torque to factory specifications.
6. Route the license plate light connector into the under-tail section and reconnect to the wiring harness.
7. Reinstall bodywork using reverse steps of removal.
8. Reinstall both the rider and passenger seat.
9. Check for proper function of license plate light, turn signals, brake light, and that all brackets and components are secure prior to riding.