



YOSHIMURA


RESEARCH&DEVELOPMENT OF AMERICA, INC.

5420 DANIELS STREET STE A, CHINO CA., 91710 · (800) 634-9166 · (909) 628-4722 · FAX (909) 591-2198

www.yoshimura-rd.com

FENDER ELIMINATOR KIT






075BG147200
Kawasaki ZX-4RR

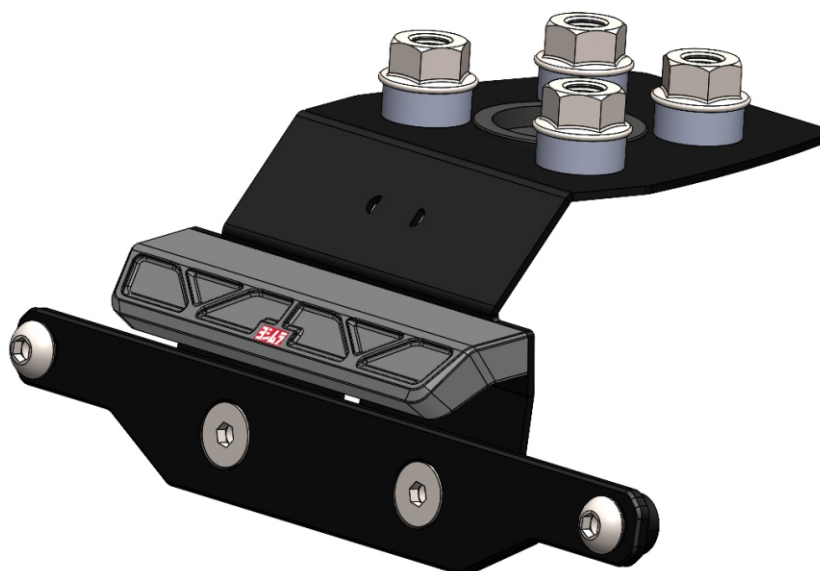

THIS PRODUCT IS NOT DOT APPROVED.

Yoshimura R&D of America, Inc. is not liable or responsible for any resulting event caused by the installation of this product. Check with local laws and regulations for compliance prior to installation and use. This product is not intended for use on public highways.

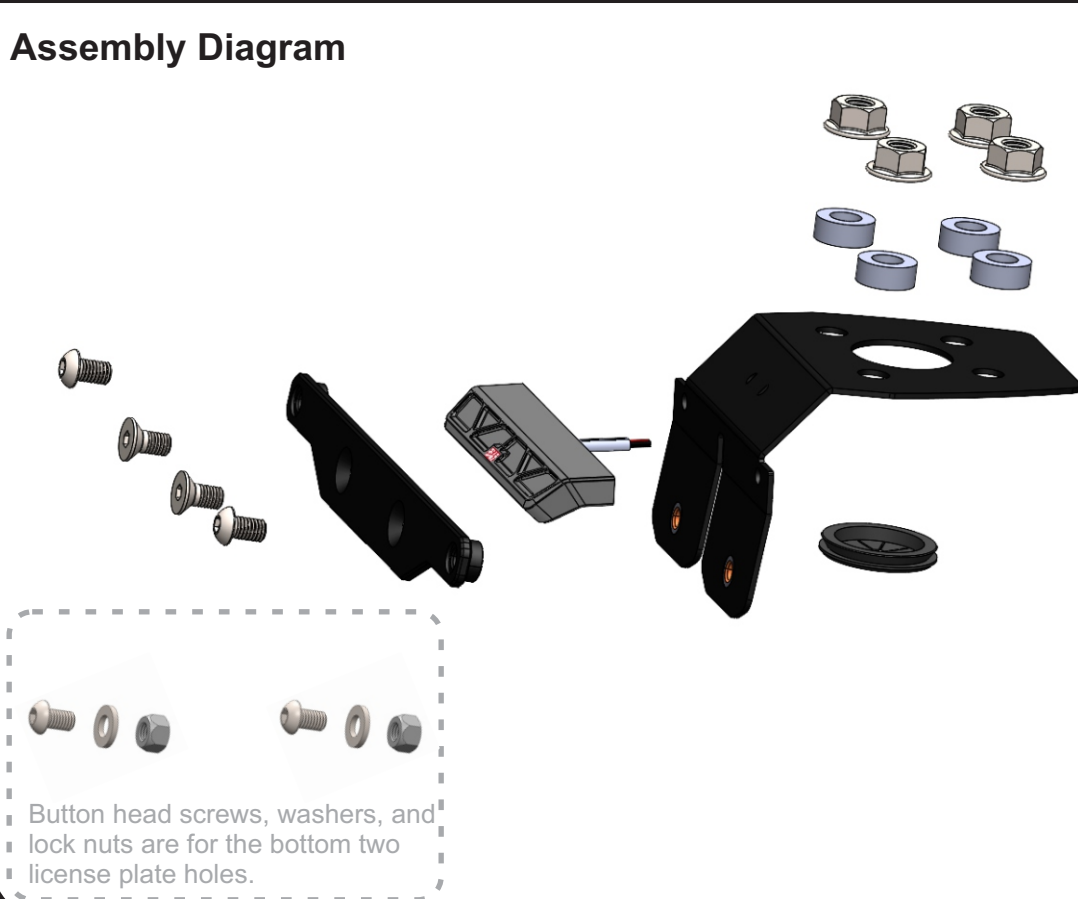

x1  14720-FEBKT1 Fender Eliminator Bracket	x1  075BG-LH-K2 License Plate Light	x1  FE-LP-BKT License Plate Bracket	
x2  M6X12FS-SS 6mm x 12mm Flat Head Screw	x4  M6X10BHS 6mm x 10mm Button Head Screw	x2  M4X6BHS 4mm x 6mm Button Head Screw	x4  14720-SPR Fender Bracket Spacer
x2  6MMWASHER 6mm Washer	x2  6MMLN 6mm Lock Nut	x1  H-2158T Wire Debris Cover	x1  ZT-400 Cable Tie
Assembly Diagram  Button head screws, washers, and lock nuts are for the bottom two license plate holes.			x4  8MMNUT 8mm Flange Nut

IMPORTANT NOTE:


This kit does not include turn signal brackets to install OEM or aftermarket turn signals. Ensure you have all necessary components prior to beginning installation.

Removal


1. Remove passenger & rider seat.
2. Locate and disconnect license plate light and turn signal connectors.
3. While securely supporting the stock fender assembly, remove the four bolts securing the fender assembly to the frame. Carefully remove the stock fender assembly making sure not to damage the connectors in the process.

Installation

1. Install *075BG-LH-K2*, license plate light onto *14720-FEBKT1*, fender eliminator bracket using *M4X6BHS*, 4mm button head screws.

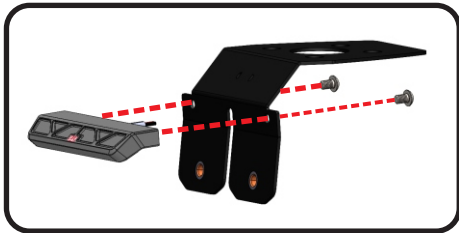

2. Install *H-2158T*, wire debris cover into *14720-FEBKT1*, fender eliminator bracket.

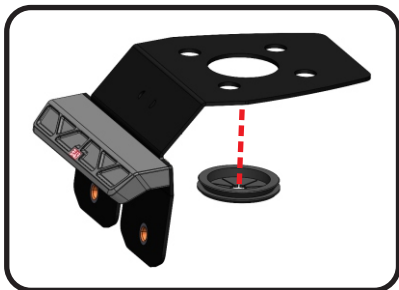


3. Install *FE-LP-BKT*, license plate bracket onto the fender eliminator bracket using *M6X12FS-SS*, flat head screws.




Note: *M6X10BHS*, button head screws will be used to secure the license plate to *FE-LP-BKT*, license plate bracket. *6MMLN-SS*, nylon lock nuts and *6MMWASHER-SS*, washers are for the bottom license plate holes.

4. Route *ZT-400*, cable tie through the fender eliminator bracket's crescent holes. Do not tighten at this time.

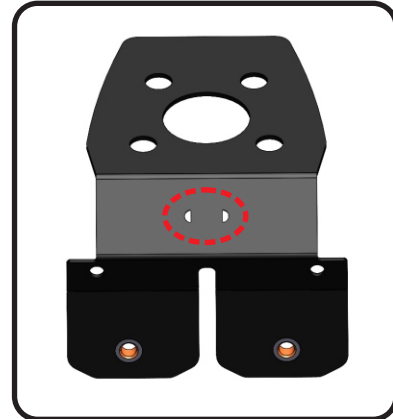

5. Install assembled fender eliminator using the stock fender bolts, *14720-SPR*, fender bracket spacer, and *8MMNUT*, 8mm flange nuts. Route license plate light and turn signal wires through *H-2158T*, wire debris cover on fender eliminator bracket and through under-tail. Torque bolts to factory specification.

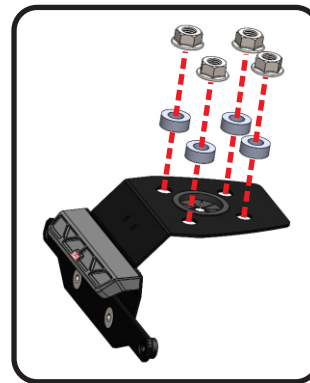

6. Route wires in stock location, re-connect license plate light to the wiring harness, and tighten the cable tie.
7. Re-install passenger & rider seat.
8. Check for proper function of license plate light, turn signals, brake light, and that all brackets and components are secure prior to riding.