



YOSHIMURA

RESEARCH&DEVELOPMENT OF AMERICA, INC.


5420 DANIELS STREET STE A, CHINO CA., 91710 · (800) 634-9166 · (909) 628-4722 · FAX (909) 591-2198

www.yoshimura-rd.com

FENDER ELIMINATOR KIT

075BG193900





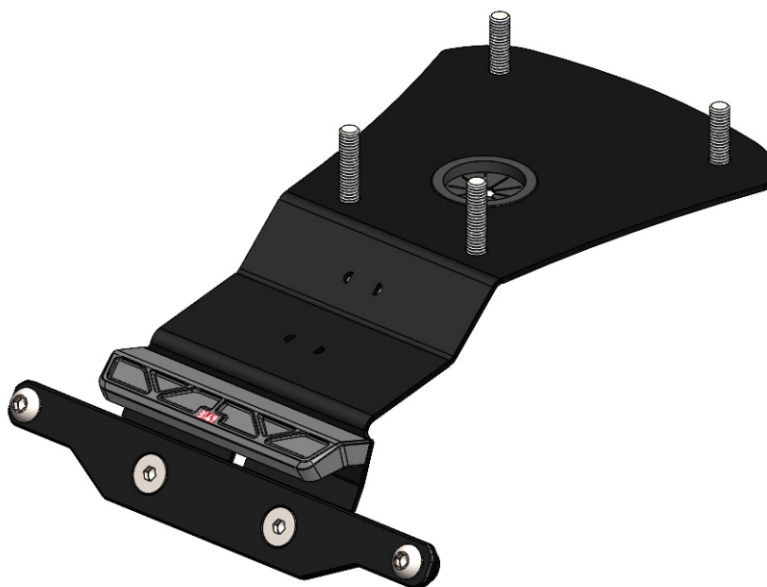






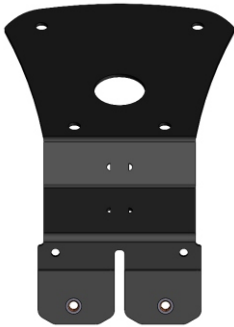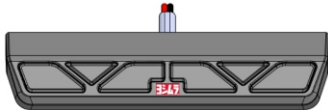


Triumph Speed 400 / Scrambler 400



THIS PRODUCT IS NOT DOT APPROVED.

Yoshimura R&D of America, Inc. is not liable or responsible for any resulting event caused by the installation of this product. Check with local laws and regulations for compliance prior to installation and use. This product is not intended for use on public highways.

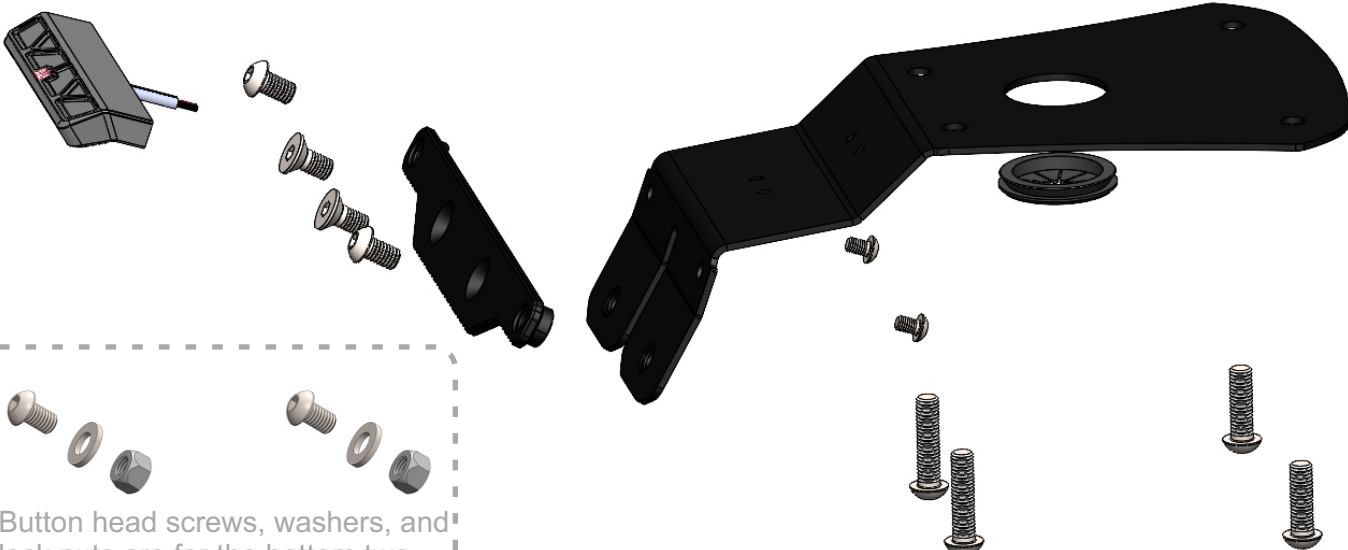

<div>x1</div> <div></div> <div>19390-FEBKT Fender Eliminator Bracket</div>	<div>x1</div> <div></div> <div>075BG-LH-T1 License Plate Light</div>	<div>x1</div> <div></div> <div>FE-LP-BKT License Plate Frame</div>	
<div>x3</div> <div></div> <div>M6X25BHS 6mm x 25mm Button Head Screw</div>	<div>x2</div> <div></div> <div>M6X20BHS-SS 6mm x 20mm Button Head Screw</div>	<div>x2</div> <div></div> <div>M6X12FS-SS 6mm x 12mm Flat Head Screw</div>	<div>x4</div> <div></div> <div>M6X10BHS 6mm x 10mm Button Head Screw</div>
<div>x2</div> <div></div> <div>6MMWASHER-SS 6mm Washer</div>	<div>x2</div> <div></div> <div>6MMLN-SS 6mm Lock Nut</div>	<div>x1</div> <div></div> <div>M4X6BHS 4mm x 6mm Button Head Screw</div>	<div>x1</div> <div></div> <div>H-2158T Wire Grommet</div>
<div>Assembly Diagram</div> <div></div> <div><div></div><div>Button head screws, washers, and lock nuts are for the bottom two license plate holes.</div></div>			<div>x2</div> <div></div> <div>ZT-400 Cable Tie</div>

IMPORTANT NOTE:

This kit does not include turn signal brackets to install OEM or aftermarket turn signals.


Ensure you have all necessary components prior to beginning installation.

Removal

1. Remove the passenger seat.
2. Locate and disconnect the license plate light connector.
3. While securely supporting the stock fender assembly, remove the 4 bolts securing the stock fender and carefully remove the stock fender assembly.
4. Disassemble the rear fender assembly and disconnect the turn signals, then re-connect the sub-harness.

Installation


1. Install *075BG-LH-T1*, Yoshimura license plate light onto *19390-FEBKT*, Yoshimura fender eliminator bracket using *M4X6BHS*, 4mm button head screws provided in the kit. Connect to the rear fender's sub-harness.

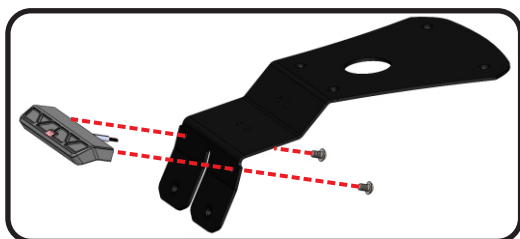

NOTE: For OEM turn signal bracket installation, see appendix below.


****[19390-TSB OEM Turn Signal Bracket Kit](#)****

2. Install *FE-LP-BKT*, license plate bracket onto the fender eliminator bracket using *M6X12FS-SS*, flat head screws.

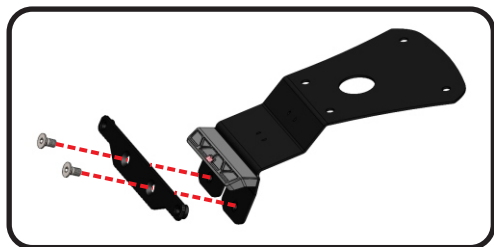


Note: *M6X10BHS*, button head screws will be used to secure the license plate to *FE-LP-BKT*, license plate bracket. *6MMLN-SS*, nylon lock nuts and *6MMWASHER-SS*, washers are for the bottom license plate holes.

3. Install *H-2158T*, wire grommet into *19390-FEBKT*, fender eliminator bracket from below.

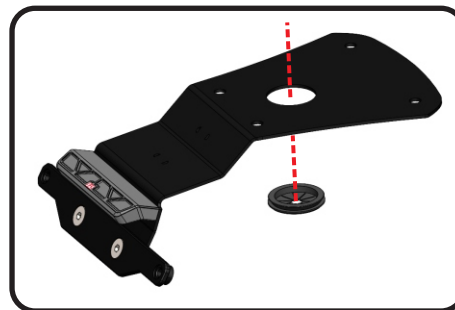

4. Route *ZT-400*, cable ties through the crescent holes in the fender eliminator bracket. Do not tighten at this time.
5. Route the license plate light wire through the hole in fender bracket, through the under-tail, and re-connect to the wiring harness.
6. Secure fender eliminator bracket assembly to frame using *M6X20BHS-SS* and *M6X25BHS*, button head screws. Torque bolts to factory specifications.

Note: *M6X20BHS-SS* screws are for the back holes of the fender eliminator bracket while *M6X25BHS* screws are for the holes closest to the tail of the bike.

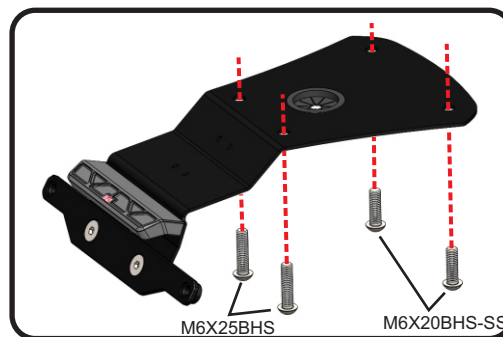

7. Tighten both cable ties and re-install passenger seat.
8. Check for proper function of license plate light, turn signals, brake light, and that all brackets and components are secure prior to riding.