



YOSHIMURA


RESEARCH&DEVELOPMENT OF AMERICA, INC.

5420 DANIELS STREET STE A, CHINO CA., 91710 · (800) 634-9166 · (909) 628-4722 · FAX (909) 591-2198

www.yoshimura-rd.com

TURN SIGNAL ADAPTER PLATES

SUZUKI SV650(X) 073BG116700

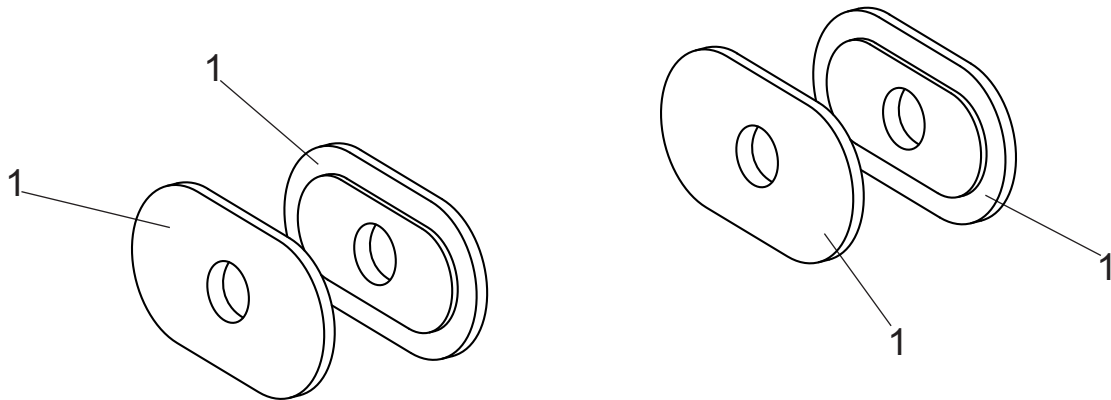

No.	Item	Description	Qty.
1	-	Front Turn Signal Plate	4
Optional Accessories			
	072BGLTSFK	Yoshimura LED Front Turn Signal Kit	
	073BG-SUZ	Yoshimura Plug-and-Play Turn Signal Wire Adapter	

** Not shown on diagram.

IMPORTANT: Installation of this product requires the use of aftermarket M8 mounted turn signals.
Not compatible with stock turn signals.

Removal

1. Remove meter cover or headlight cowl for "X" model.
2. Remove the two headlight screws on headlight housing and remove the headlight to access front turn signal wires.
3. Locate and disconnect left and right turn signal connectors.
4. Remove left and right turn signals off of headlight brace.

Installation

1. Insert turn signal plates into headlight brace and install aftermarket turn signal. Secure using turn signal washer and nut.
2. Repeat steps for opposite side.
3. Route turn signal wires through headlight housing and re-connect left and right turn signal connectors.

Note: 073BG-SUZ turn signal adapter wires are available for purchase separately for direct plug-and-play alternative with Yoshimura LED turn signals.

4. Re-install headlight onto headlight housing using opposite steps of removal.
5. Re-install meter cover or headlight cowl using opposite steps of removal.
6. Check for proper function of turn signals and that all components are secure prior to riding. Adjust turn signal rotation as needed and tighten turn signal nut.

