



# YOSHIMURA

RESEARCH&DEVELOPMENT OF AMERICA, INC.

5420 DANIELS STREET STE A, CHINO CA., 91710 · (800) 634-9166 · (909) 628-4722 · FAX (909) 591-2198


[www.yoshimura-rd.com](http://www.yoshimura-rd.com)

## **TURN SIGNAL ADAPTER PLATES**

### **Honda**

### **CB 750 Hornet**

### **073BG127600**

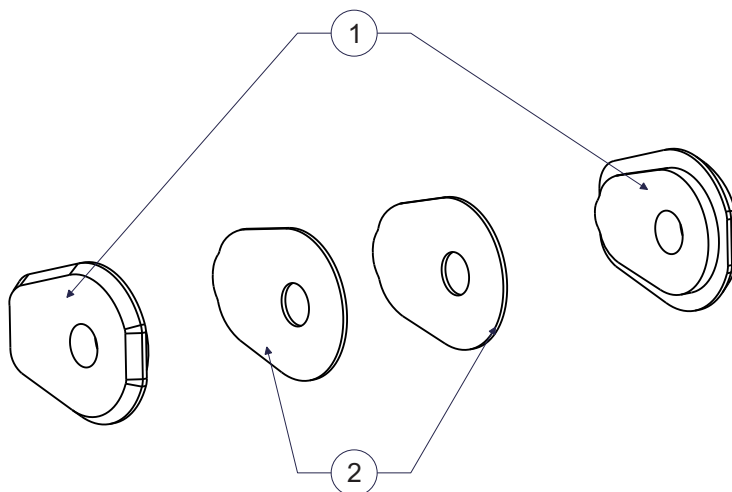


No.	Item	Description	Qty.
1	073BG121500-B	Front Turn Signal Plate	2
2	073BG121500-IN	Metal Inner Plate	2
<b>Optional Accessories</b>			
	072BGLTSFK	Yoshimura LED Front Turn Signal Kit	
	072BGLTSFK-S	Yoshimura Sequential LED Front Turn Signal Kit	

## Removal

1. Remove the headlight cowl and meter cover.

Note: Uninstalls as one piece.

2. Locate and disconnect the turn signal connectors.
3. Remove the meter display.
4. Remove the headlight stay bolts.

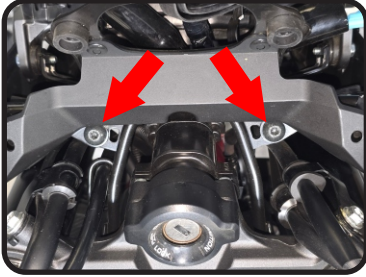


5. Remove the turn signal holder.
6. Remove turn signals from the turn signal holder.

## Installation

1. Install aftermarket turn signal and *073BG127600-B*, front turn signal plate onto front side of the turn signal holder. Install *073BG127600-IN*, metal inner plate on backside of turn signal holder and secure using turn signal nut.

Rear of Bike

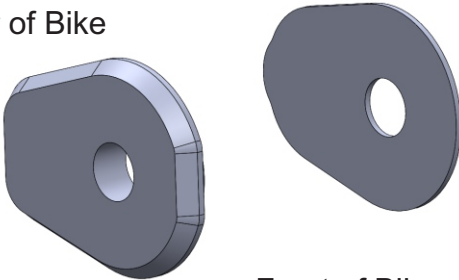

Front of Bike

**RIGHT SIDE EXAMPLE SHOWN**

2. Repeat steps for the opposite side.

3. Reconnect turn signals.
4. Reinstall headlight stay bolts, meter display, cowls and meter cover using the reverse steps of removal.
5. Check for proper function of turn signals and that all components are secure prior to riding. Adjust turn signal rotation as needed and tighten turn signal nut.