



# YOSHIMURA

RESEARCH&DEVELOPMENT OF AMERICA, INC.


5420 DANIELS STREET STE A, CHINO CALIF. 91710 · (800)634-9166 · (909)628-4722 · FACSIMILE (909)591-2198

[www.yoshimura-rd.com](http://www.yoshimura-rd.com)

## CHASSIS PROTECTOR SET

**Kawasaki  
ZX-14R**

**040BG141400** CHASSIS PROTECTOR SET

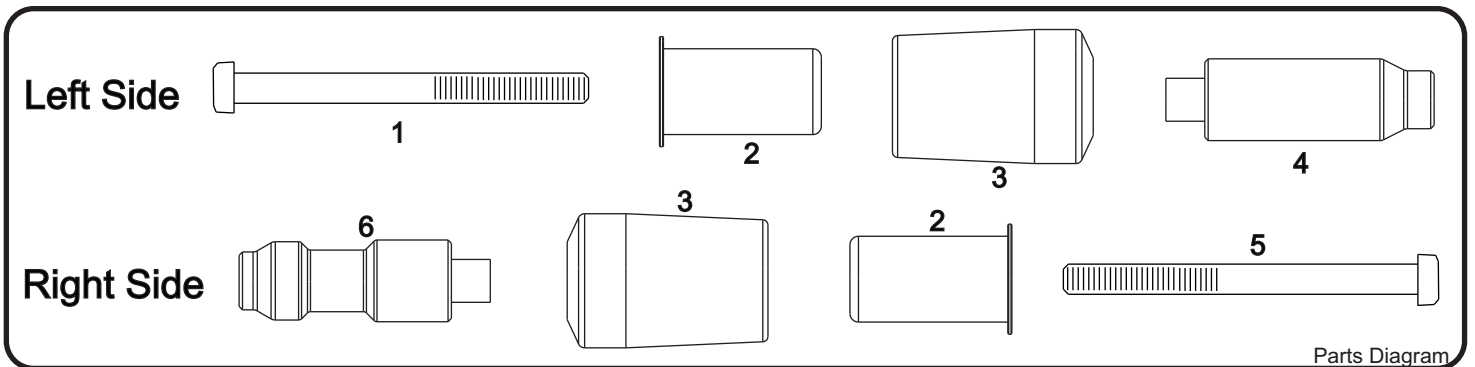

Parts Diagram

### Part List:

NO.	DESCRIPTION	QTY	PART #
1	10mm x 150mm Bolt	1	M10X1.25X150
2	Left and Right Insert	2	040BG-MLI-10
3	Left and Right Chassis Protector	2	040BG-ML
4	Aluminum Spacer (Left Side)	1	14140-CHS-SPL
5	10mm x 140mm Bolt	1	M10X1.25X140
6	Aluminum Spacer (Right Side)	1	14140-CHS-SPR
**	Yoshimura Sticker	2	17020C

**Caution:** Engine mount bolts can be extremely hot. Let motorcycle cool down before beginning installation. Always wear hand and eye protection and take precautionary measures to avoid injury.

**Note:** Read through all instructions before beginning installation.

### Tools Needed:

- Ratchet and Extension
- Metric Allen Socket Set
- Torque Wrench

### Installation Steps:

- Remove left engine mount bolt.  
**NOTE:** Remove engine mount bolt one side at a time. Removing both left and right side engine mount bolts simultaneously may result in engine to drop or sag causing mounting holes to be misaligned.
- Install left side chassis protector, arranging components according to the diagram.
- Torque chassis protector bolt to 35 ft-lbs. (48Nm, 4.8kg-m)
- Remove right engine mount bolt.
- Install right side chassis protector, arranging components according to the diagram.
- Torque chassis protector bolt to 435 ft-lbs. (48 Nm, 4.8kg-m)