



YOSHIMURA

RESEARCH&DEVELOPMENT OF AMERICA, INC.

5420 DANIELS STREET STE A, CHINO CALIF. 91710 · (800)634-9166 · (909)628-4722 · FACSIMILE (909)591-2198

www.yoshimura-rd.com


CHASSIS PROTECTOR SET

KAWASAKI
2011-2014
ZX10R


040BG141800

CHASSIS PROTECTOR SET BLACK

Left Side

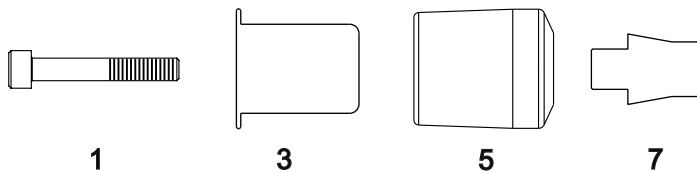

Right Side

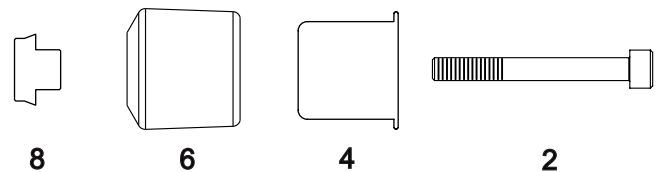

Parts Diagram

Parts List:

| NO. | DESCRIPTION | QTY | PART # |
|-----|---|-----|----------------|
| 1 | 10mm x 1.25mm x 80mm Bolt | 1 | M10X1.25X80 |
| 2 | 10mm x 1.25mm x 90mm Bolt | 1 | M10X1.25X90 |
| 3 | Aluminum Insert for Chassis Protector (L) | 1 | 1115-A03-01-IK |
| 4 | Aluminum Insert for Chassis Protector (R) | 1 | 1115-A05-01-IK |
| 5 | Yoshimura Chassis Protector (Left Side) | 1 | 1115-A03-01 |
| 6 | Yoshimura Chassis Protector (Right Side) | 1 | 1115-A05-01 |
| 7 | Aluminum Spacer (Left Side) | 1 | 1116-A02-00 |
| 8 | Aluminum Spacer (Right Side) | 1 | 040BG141800SR |
| ** | Yoshimura Sticker | 2 | 17020C |

Caution: *Motorcycle can be extremely hot after riding. Let motorcycle cool down before beginning installation. Always wear hand and eye protection and take precautionary measures to avoid injury.*

Note: *Read through all instructions before beginning installation.*

Tools Needed:

Ratchet and Extension
Metric Allen Socket Set
Metric Socket Set
Torque Wrench

Installation Steps:

1. Remove left side engine mount bolt.
2. Install left side Yoshimura Chassis Protector. See diagram for orientation.
3. Remove right side engine mount bolt.
4. Install right side Yoshimura Chassis Protector. See diagram for orientation.
4. Torque bolts to 32ft-lb. (44Nm, 4.5kgf-m)

IMPORTANT NOTE: *INSTALL CHASSIS PROTECTOR ONE SIDE AT A TIME. IF BOTH ENGINE MOUNTS ARE REMOVED AT THE SAME TIME, ENGINE MAY DROP OR HOLES MAY BE MISALIGNED AS A RESULT.*