



YOSHIMURA


RESEARCH&DEVELOPMENT OF AMERICA, INC.

5420 DANIELS STREET STE A, CHINO CA., 91710 · (800) 634-9166 · (909) 628-4722 · FAX (909) 591-2198

www.yoshimura-rd.com

TURN SIGNAL ADAPTER PLATES

2017~2019 Honda Grom 073HA121210

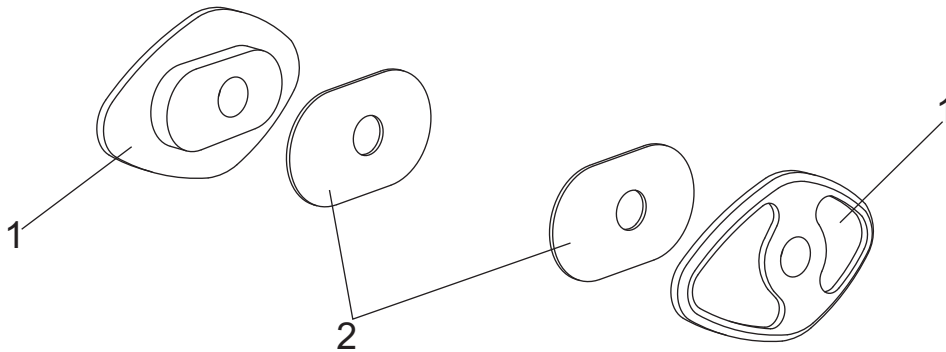

No.	Item	Description	Qty.
1	073HA121210-1	Front Turn Signal Plate	2
2	073HA121210-B	Turn Signal Backing Plate	2
**	17100	Sticker Sheet	1
Optional Accessories			
	072BGLTSFK	Yoshimura LED Front Turn Signal Kit w/ Relay	
	073BG-HON	Yoshimura Plug-and-Play Turn Signal Wire Adapter	

** Not shown on diagram.

IMPORTANT: Installation of this product requires the use of aftermarket M8 mounted turn signals.
Not compatible with stock turn signals.

Removal

1. Remove the four bolts securing headlight assembly to frame and carefully pull out headlight assembly.
2. Locate and disconnect headlight connector and sub-harness connector and remove headlight assembly.
3. Locate and disconnect left and right turn signal connectors.
4. Remove headlight side covers by removing the headlight aiming screw and plastic trim push clip. Carefully twist and remove left and right headlight side covers.
5. Disassemble and remove left and right turn signals from headlight side covers.

Installation

1. Install aftermarket turn signal and (No. 1) *073HA121210-1*, front turn signal plate onto frontside of headlight side cover. Install (No. 2) *073HA121210-B*, turn signal backing plate on backside of headlight side cover and secure using turn signal nut.
2. Repeat steps for opposite side.
3. Re-install left and right headlight side covers onto headlight assembly and re-connect turn signal connectors.
4. Re-connect headlight connector and sub-harness connector and re-install headlight assembly using the four stock bolts.
5. Adjust and re-aim headlight as necessary.
6. Check for proper function of headlight and turn signals and that all components are secure prior to riding.

