




PERFORMANCE ACCESSORIES


APPLICATION

YEAR	MODEL
2011-2013	Polaris RZR XP900
2013	Polaris RZR XP900 Jagged X

PRODUCT

905BG399000	XP900 11-12 Radiator Guard Kit
-------------	--------------------------------

 Read through all instructions before beginning installation. Let vehicle cool down before beginning installation. Always wear hand and eye protection and take precautionary measures to avoid injury.

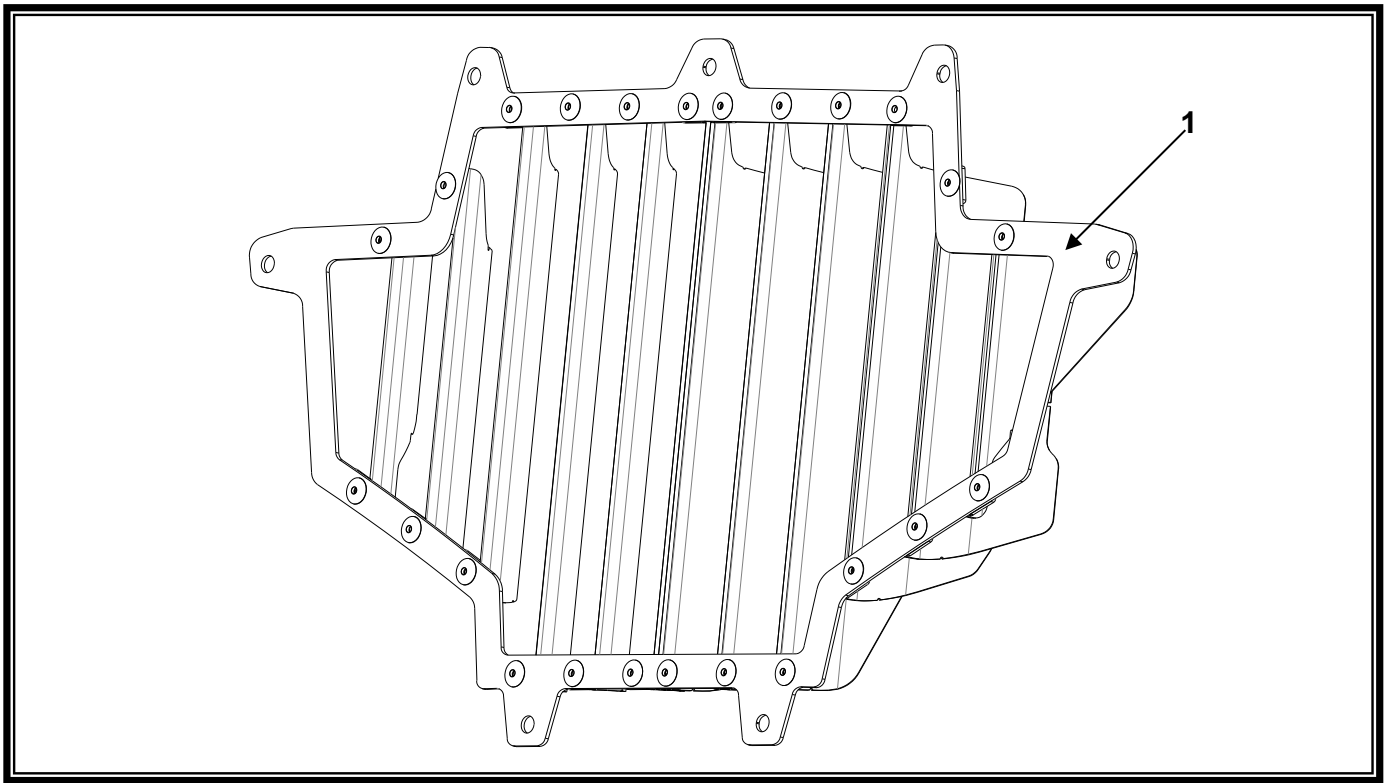

No.	Part #	Description	Qty
1	39900-RG	Yoshimura Radiator Guard	1
**	SCR10-314	Mounting Screw	7
**	17020C	Yoshimura Sticker	2

-TOOLS REQUIRED-
Torx Socket Set • Screwdriver

-REMOVAL-

- 1. Disconnect the left and right headlight plug.***
- 2. Remove the (6) center torx bolts securing the front bumper to the chassis.***
- 3. Remove the left and right side torx bolt and push tab that secure the bumper to the fender.***
- 4. Carefully remove the front bumper by pulling forward away from the vehicle.***
- 5. Set the bumper down and remove the (7) screws securing the front bumper grill to the bumper from the back side.***

Note: 2012 model do not have screws securing grille to bumper.

-INSTALLATION-

- 1. Install Yoshimura Radiator Guard over the stock bumper grill using the (7) factory screws.***

Note: For 2012 model, use provided mounting screws to secure Yoshimura Radiator guard behind bumper grille.

- 2. Re-install front bumper using the reverse steps of removal.***
- 3. Check that all bolts are tight and secure prior to driving vehicle.***